


TROPIC® MONOBLOCK LAVATORY FAUCET

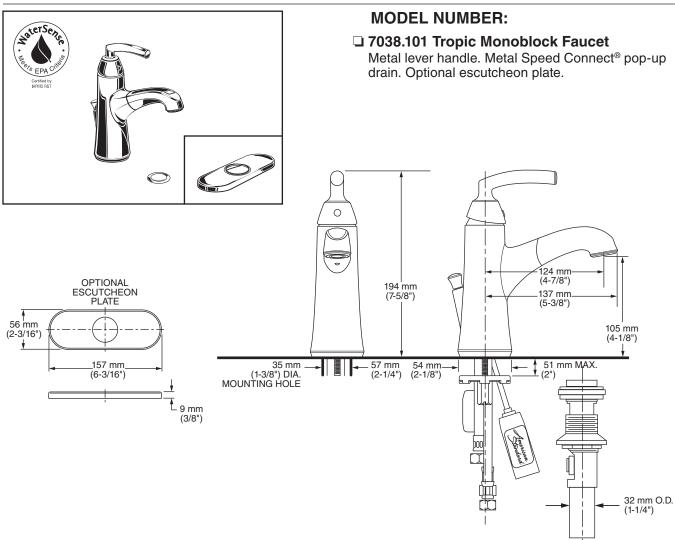

GENERAL DESCRIPTION:

All metal body with choice of all metal lever handle. Washerless 35 mm ceramic disc valve cartridge with integral hot limit safety stop. Pull-out spray spout (can be locked to spout base, if desired). Hose is 1100 mm (44") long with 625 mm (24") reach. Complete with 2 integral check valves. Braided flexible supply hoses with 3/8" compression connections. 20" (500 mm) long flexible stainless steel drain cable is pre-assembled to faucet body. Metal Speed Connect_® drain body with 1-1/4" (32 mm) tail piece. 1.2 gpm/4.5 L/min. maximum flow rate. Fitting can be mounted on 4" centers using optional 4" escutcheon or single hole mounting method.

PRODUCT FEATURES:

Ceramic Disc Valve Cartridge: Assures smooth, precise valve control and a lifetime of drip-free, maintenance-free performance.

Adjustable Hot Limit Safety Stop: Limits the amount of hot water allowed to mix with cold. Reduces the risk of accidental scalding.

Exclusive Speed Connect Metal Drain:

- Fewer parts. Installs in less time.
- No adjustments required seals the first time, every time.
- Flexible stainless steel cable installs effortlessly in tight spaces.

Lead Free: Faucet contains ≤ 0.25% total lead content by weighted average.

SUGGESTED SPECIFICATION

Monoblock lavatory fitting shall feature a pull-out spout with two check valves. Shall feature an all metal body with metal lever handle. Shall feature a flexible hose connections. Shall also feature a washerless ceramic disc valve cartridge with integral hot limit safety stop. Shall also feature a metal drain body with stainless steel cable actuation. Fitting shall be American Standard Model# 7038.101.____.

© 2015 AS America, Inc.

Revised 12/15




MONOBLOCK LAVATORY FAUCET

CODES AND STANDARDS

These products meet or exceed the following codes and standards:

ANSI A117.1 ASME A112.18.1 CSA B125.1 NSF 61/Section 9 and Annex G



			Finish Options	
			Polished Chrome	PVD Satin Nickel
Product Number	Description		002	295
7038.101	Tropic® Monoblock Faucet. Metal lever handle. Metal Speed Connect® pop-up drain. Optional escutcheon plate.	5		

Meets the American Disabilities Act Guidelines and ANSI A117.1 Requirements for the physically challenged.

AVAILABLE N	Parts Suffix*	
	Less Pop-Up Drain Less Hole	LDH

^{*}To modify a product, add suffix afterthe 4th digit (ex. 2064F05101.002)

Revised 12/15 © 2015 AS America, Inc.

^{**}Modified product models are **NOT** WaterSense certified.