




## MÉTALLIQUE™ FRAMED CABINET

### Features

- Mirrored doors and interior, matte silver interior
- 3-way adjustable concealed hinge system
- SAFESEAL™ gasket frame
- Patented swing-out magnifying mirror
- Rust-free aluminum construction
- Can be installed as a left- or right-hand door swing
- Three adjustable glass shelves
- 23-1/4" (59.1 cm) x 30" (76.2 cm) x 5" (12.7 cm)

**MT24D4MDCR**  
**ALSO MT24D4MDBN, MT24D4MDMG**

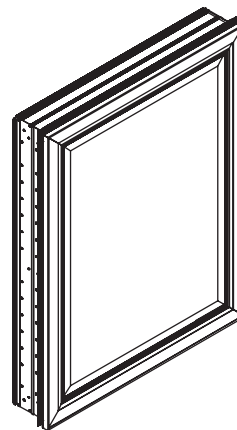

### Codes/Standards Applicable

Specified model meets or exceeds the following:

- None applicable

### Specified Model

Model	Description	
MT24D4MDCR	Polished chrome framed mirror, left or right	<input type="checkbox"/>
MT24D4MDBN	Brushed nickel framed mirror, left or right	<input type="checkbox"/>
MT24D4MDMG	Monaco gold framed mirror, left or right	<input type="checkbox"/>
<b>Required Accessories - For Surface-Mount Installations Only</b>		
MTSK30D4	Plain mirror side kit	<input type="checkbox"/>
M30SKD4A	Aluminum side kit	<input type="checkbox"/>
<b>Optional Accessories</b>		
SLB24D4	Safety-lock box	<input type="checkbox"/>
CAHM-A	Cabinet mounted halogen light, chrome and glass shade	<input type="checkbox"/>
CAHM-B	Cabinet mounted halogen light, all chrome shade	<input type="checkbox"/>
CAHM-CE	Cabinet mounted halogen light, ebony black shade	<input type="checkbox"/>
CAHM-CS	Cabinet mounted halogen light, matte silver shade	<input type="checkbox"/>
MLLWMDBN	Métallique™ single wall sconce with brushed nickel backplate	<input type="checkbox"/>
MLLWMDCR	Métallique™ single wall sconce with polished chrome backplate	<input type="checkbox"/>
Cabinet cannot be recessed when using a CAHM light. Refer to the Price Guide for more information.		

# MÉTALLIQUE™ FRAMED CABINET

## Technical Information

Roughing-in opening	22-1/2" (57.2 cm) x 29-1/4" (74.3 cm) x 4" (10.2 cm)
Door opening angle	170°


## Installation Notes

Install this product according to the installation guide.

When determining the height of the mirrored cabinet, ensure the mirrored door will clear all obstacles, such as a faucet. A minimum distance of 1" (2.5 cm) is required.

Secure the screws (provided) to a stud to avoid possible property and product damage. If this is not possible, anchors (provided) must be inserted before installing the screws.

Recessed cabinets project less than 1-1/4" (3.2 cm) from wall.

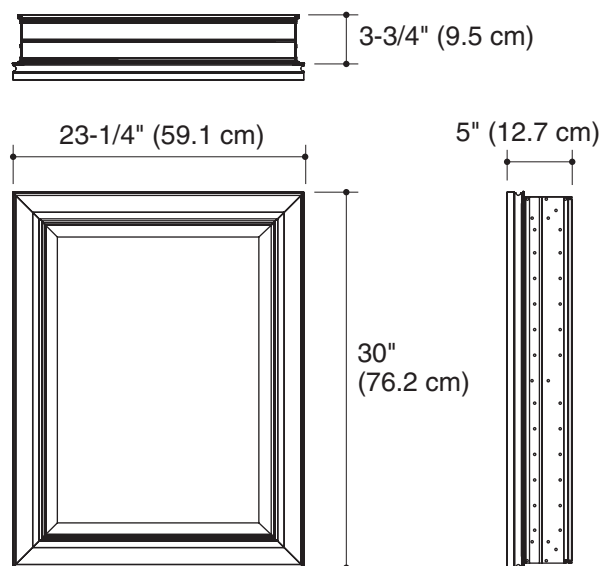

Product Diagram