



VOLUME CONTROL ROUGH

ROHL Shower

R1040R (Counterclockwise Opening)

R1041R (Clockwise Opening)

FEATURES



- 1 inlet, 1 outlet
- 3/4" NPT inlet
- 3/4" NPT outlet
- Back of valve to finished wall 4" min., 4 1/2" max.
- One extension kit included. Cut to length desired
- Extension kits can be stacked. Order part # R3-056
- 16 GPM
- Rough can be used with multiple product lines:
 - Perrin & Rowe®
 - Italian Country Bath
 - Palladian
 - Vincent
 - Michael Berman
 - Modern Lombardia
- To complete package, must order trim set

COLORS/FINISHES

- Rough Only

WARRANTY

- Limited Lifetime

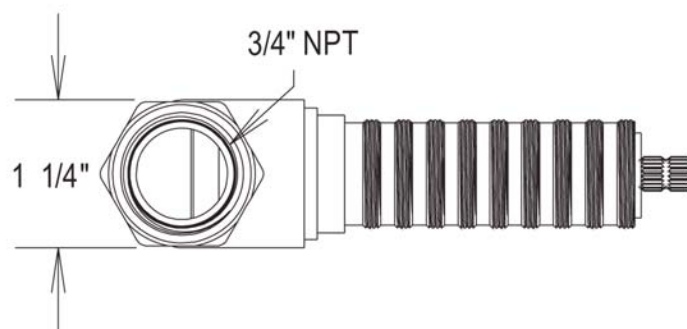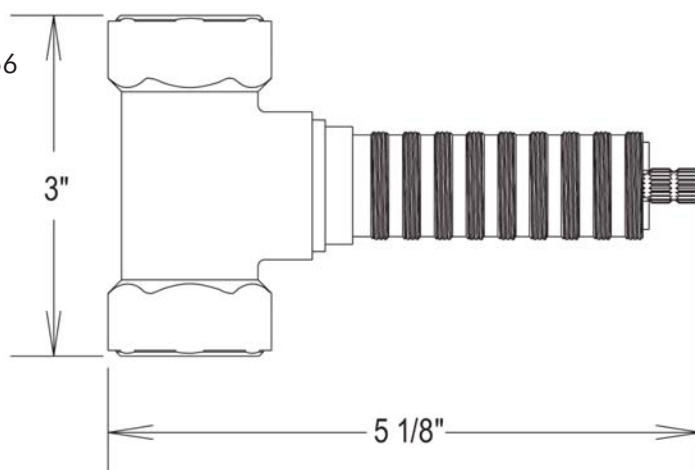


R1040R & R1041R Installation Instructions

ROHL® R1040R

Rough 3/4" Counterclockwise Opening
Concealed Wall Valve for Volume Control

INSTALLATION INSTRUCTIONS

ITEM NO	PART NUMBER	DESCRIPTION	QTY.
1	10218	3/4 SHUTOFF TEE	1
2	10333	20 PT. BROACH STABILIZER	1
3	10332	20 POINT BROACH EXTENSION	1
4	10334	M24X1.0 ALL THREAD EXTENSION	1
5	9.15402	PLASTIC VERNIER HANDLE ADAPTOR	1
6	10215	STANDARD COUNTERCLOCKWISE CARTRIDGE	1
6*A	10214	CLOCKWISE CARTRIDGE (SOLD SEPARATELY)	1

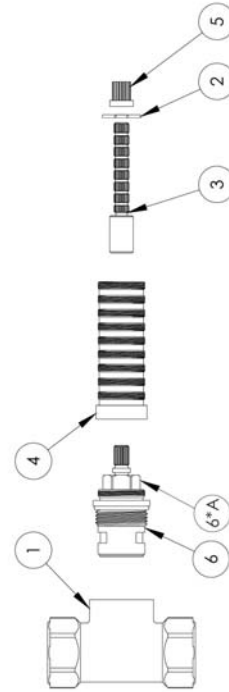


ROHL WARRANTY POLICY

- ROHL PRODUCTS ALL CARRY WARRANTIES AGAINST MANUFACTURING DEFECTS.
- THE R1040R VALVES CARRY A LIMITED LIFETIME WARRANTY.
- ROHL LLC WILL PROVIDE FREE OF CHARGE, AT ITS OPTIONS, REPLACEMENT PART(S) OR PRODUCT (OR A COMPARABLE ALTERNATIVE PRODUCT) TO REPLACE THOSE WHICH HAVE PROVEN DEFECTIVE IN MATERIALS OR WORKMANSHIP.

SPARE PARTS AND SERVICE:

ROHL
3 PARKER
IRVINE, CA 92618
P (714) 557-1933
F (714) 557-8635
WWW.ROHLHOME.COM

R1040R & R1041R Installation Instructions

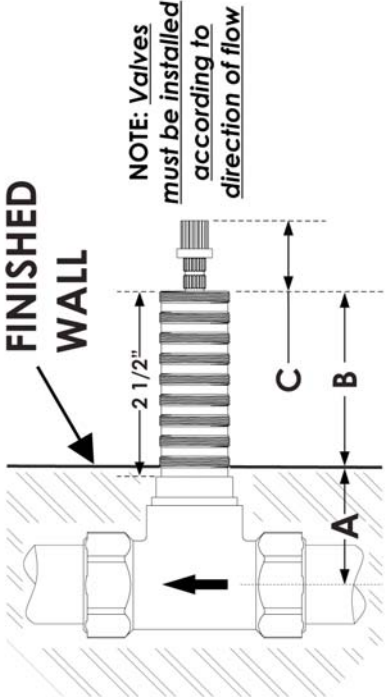

NOTE: Valves must be installed according to direction of flow

REQUIRED MEASUREMENTS

A = 1 1/8" MIN.

B = ~5/16" (MUST LEAVE MIN. 5/16" EXPOSED OR TRIM WILL NOT FIT)

C = ~3/4" (MUST LEAVE MIN. 3/4" EXPOSED OR HANDLE WILL NOT ATTACH)

BEFORE USE:

- CAREFULLY CHECK THE INSTALLATION FOR LEAKS.
- IF FURTHER WORK IS GOING TO BE DONE IN THE VICINITY OF THE VALVE AND TRIM, COVER THE INSTALLATION WITH A PLASTIC BAG TO HELP AVOID DAMAGE TO THE FINISH.

CARE AND MAINTENANCE:

- RECOMMEND OCCASIONAL CLEANING WITH WARM SOAPY WATER FOLLOWED BY POLISHING WITH A SOFT CLOTH TO KEEP THE PLATED FINISH IN GOOD CONDITION.
- DO NOT USE ABRASIVE LIQUIDS, POWDERS, OR PADS TO CLEAN THE PRODUCT. YOU WILL DAMAGE THE FINISH AND VOID THE WARRANTY.

SPECIFICATIONS

TEMPERATURE RANGE:

- MINIMUM 34°F
- MAXIMUM 185°F

RECOMMENDED OPERATING PRESSURE:

- MINIMUM 15 PSI
- MAXIMUM 75 PSI

INSTALLATION NOTES

- MUST HAVE BOTH ROUGH AND TRIM TO COMPLETE THE INSTALLATION.
- FLUSH THE PLUMBING SYSTEM BEFORE INSTALLING THIS PRODUCT.
- MUST FOLLOW DIMENSIONS SUPPLIED FOR INSTALLATION AND MAKE SURE ALLOWANCE IS MADE FOR FINISHED WALL MATERIAL SUCH AS TILE, ETC.
- MUST INSURE THE HANDLE IS VERTICAL WHEN THE VALVE IS IN THE "OFF" POSITION.

IMPORTANT: WE RECOMMEND THE USE OF A LICENSED PLUMBER TO INSTALL THIS PRODUCT. PLEASE READ AND UNDERSTAND THE PROVIDED INSTALLATION INFORMATION BEFORE PROCEEDING.