

# Barrier Free, Roll In Shower 60" x 30" **Elite Brilliant** - Left or Right Drain

ACCESSIBLE BATHROOMS



Model # 6030 BF 5P 1.0 L-WH ELB 6030 BF 5P 1.0 R-WH ELB 6030 BF 5P 1.0 L-BN ELB 6030 BF 5P 1.0 R-BN ELB 6030 BF 5P 1.0 L-B ELB 6030 BF 5P 1.0 R-B ELB

Elite Brilliant Accessories (page 2)

## hansgrohe

German Engineering



Italian Design

Outside Dimensions: 31" W x 60" L x 78" H Shipping Dimensions: 48" W x 79" L x 84" H

Shipping Weight: 437 lbs. Net Weight: 425 lbs.

Threshold Height: 1" Change of Level L

### **Package Options:**

- White (W), Bone (BN) or Biscuit (B) Shower Panels
- Right, Left or Center Drain
- Standard (no fixtures), Standard Plus 24, Standard Plus 36 or Freedom
- Deluxe or Elite (premium fixtures in white, brilliant or satin)
- With or without integrated molded soap ledges
- Flange Trim Molding Kit
- Multi-Piece Window Trim Kit

### Panels:

Shower Base 31" W x 60" L x 4.5" H
Side Wall Panel Left 31" W x 73.5" H
Side Wall Panel Right31" W x 73.5" H
Rear Wall Panel Bottom 60" L x 44" H
Rear Wall Panel Top 60" L x 29.5" H

### Features:

- Premium marine grade gel-coat, five piece shower with 8" classic tile pattern
- Wood and steel reinforced walls for placing grab bars and seats anywhere (not dependent on stud locations)
- Easy shower wall assembly pin-lock system allowing front side installation
- Precision fit wall panel seams (match into grout pattern)
- Grip-Sure<sup>™</sup> floor texture
- Self supporting, pre-leveled shower base (no mudset required)
- Shower door friendly (squared corners allow door installation)
- Ships pre-assembled, heavy duty crating protects product in transit

### **Accessories:**

- [12] Collapsible Rubber Dam White with End Caps
- [14] 2" Chrome Strainer, Brass Drain with Friction Seal
- [15] 66" x 74" Heavy Weighted Shower Curtain

### Hansgrohe:

- [1] Hand Shower, Chroma E75 3 Jet
- [2] Vinyl Techniflex Hose
- [3] Wall Outlet Elbow in Chrome
- [4] Hand Shower Alternate Wall Mount in Chrome
- [7] HG Focus E Pressure Balance Valve
- [8] Interchangeable iBox Universal Plus

### Ponte Giulio:

- [5] Two (2) Straight Brilliant Finish (Fine Polished Stainless Steel) Grab Bars (36" and 18")
- [6] Ergonomic Hand Shower Holder ABS in Chrome
- [9] 4" x 16" Folding Seat, Stainless Steel Support, ABS White/Chrome 380lb cap.
- [10] Folding Wall Grab Bar, Elbow Support 18" Polyethylene White/Chrome
- [11] Shower Curtain Rail Brilliant Finish (Fine Polished Stainless Steel)
- [13] Rectangular Stainless Steel Soap-Sponge Basket

### Codes

IPC, UPC, ANSI Z 124.2, NAHB, HUD, FHA

### Warranty:

30 Year Limited Lifetime Warranty (on shower panels)\*

\*For more information please visit www.ellasbubbles.com

[L] Change of Level threshold has manageable 1/4" vertical rise to easily coordinate with minimum finished flooring.




# Barrier Free, Roll In Shower 60" x 30" **Elite Brilliant** Accessories





# Barrier Free, Roll In Shower 60" x 30" 6030 BF 5P 1.0 - Left or Right Drain \*Left Drain Shown

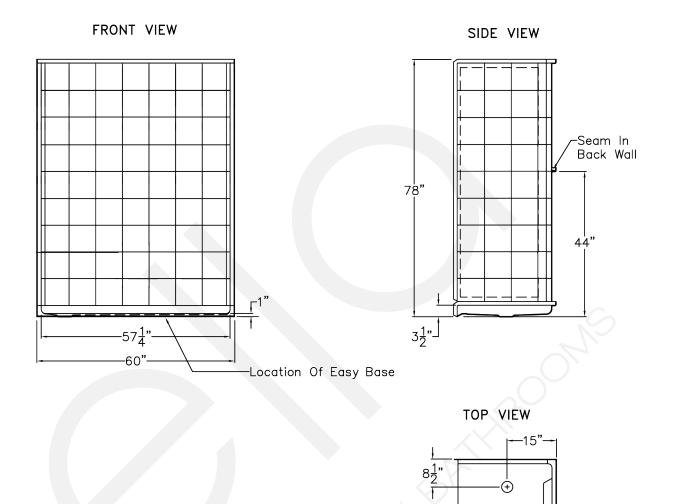

Finished

In an effort to continually improve our product, specifications and configurations are subject to change without notice. Before ordering or installing, consider future access to essential equipment. Due to the nature of the materials, dimensions may vary  $\pm 1/2$ ".

Detail of 1.0" Threshold

Easy Base

" Slope Per Foot.

-31"-



# Barrier Free, Roll In Shower Features

ACCESSIBLE BATHROOMS

### STRENGTH Wood & Steel Reinforced Walls All wall panels Metal conduit around the are backed perimeter for unmatched with 3/8" wood strength accessories can be installed Fiberglass resin structural anywhere, substrate cures to a seamless any time strong encasement Premium Marine-grade Polyurethane Gel-coat fiberglass surface reinforcement for beautiful. long-lasting


Twice the weight and twice the raw materials used in the construction of our showers than listed by any of our competitors.

Wood reinforced core walls and high density base. Metal conduit around perimeter of EACH panel for added strength.

## **ADAPTABILITY**

**Customized Accessory Placement** 

The wood reinforced core walls allow the fixtures to be installed right onto the wall studs by eliminating the need for a drywall backing.



## SHOWER DOOR FRIENDLY

Your choice: Curtain or Door

Square corners in Ella shower construction allow for framed or frameless shower doors to be installed.



Image for Illustration only

# FRONT SIDE INSTALLATION

Aluminum Pin and Slot System for a contractor friendly front side installation.

shower surface

An installation may be finished in a fraction of the time. No more need to get behind the panels to bolt large panels together.




INTEGRAL
SELF-LOCATING
METAL GUIDE
PINS

machined to a

flush, level surface

High density

structural foam





# **AVAILABILITY**

Your Project won't be held up

Ella showers are manufactured, inspected and shipped directly from the factory within 5 - 7 business days.

Rush orders are available upon request (white only).


No order is too big or small.

# SMART PACKING


Multi-piece Shower in a Box




In stock for Rapid Ship





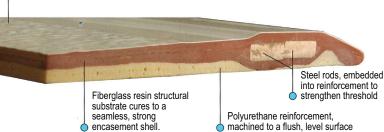



The barrier free threshold height (C) varies due to shower base sizes and floor drain location. The shower base is designed to assure the correct water flow into the floor drain. The threshold height size is located at the end of each shower model number.

Example: 6030 BF 5P .75 shows 0.75 of an inch C =  $\frac{3}{4}$ " threshold height.