

Barrier Free, Roll In Shower 60" x 30" Ella Standard Plus 24 - Left or Right Drain

ACCESSIBLE BATHROOMS



Model # 6030 BF 5P 1.0 L-WH SP24 6030 BF 5P 1.0 R-WH SP24 6030 BF 5P 1.0 L-BN SP24 6030 BF 5P 1.0 R-BN SP24 6030 BF 5P 1.0 L-B SP24 6030 BF 5P 1.0 R-B SP24

Ella Standard Plus 24 Accessories (page 2):

Hansgrohe & Ponte Giulio are optional

creating solutions

hansgrohe

German Engineering

Italian Design

Outside Dimensions: 31" W x 60" L x 78" H Shipping Dimensions: 48" W x 79" L x 84" H

Shipping Weight: 437 lbs. Net Weight: 425 lbs.

Threshold Height: 1" Change of Level L

Package Options:

- White (W), Bone (BN) or Biscuit (B) Shower Panels
- Right, Left or Center Drain
- Standard (no fixtures), Standard Plus 24, Standard Plus 36 or Freedom

Panels:

Shower Base	3۱" ۱	Wх	60"	L x 4.5	" H
Side Wall Panel Left	31″ ۱	W x	73.	5" H	
Side Wall Panel Right	31″ ۱	W x	73.	5" H	
Rear Wall Panel Bottom	60"	Lx	44"	Н	
Rear Wall Panel Top	60"	Lxí	29.5	" H	

Features:

- Premium marine grade gel-coat, five piece shower with 8" classic tile pattern
- Wood and steel reinforced walls for placing grab bars and seats anywhere (not dependent on stud locations)
- Easy shower wall assembly pin-lock system allowing front side installation
- Precision fit wall panel seams (match into grout pattern)
- Grip-Sure™ floor texture
- Self supporting, pre-leveled shower base (no mudset required)
- · Shower door friendly (squared corners allow door installation)
- Ships pre-assembled, heavy duty crating protects product in transit

- Deluxe or Elite (premium fixtures in white, brilliant or satin)
- With or without integrated molded soap ledges
- Flange Trim Molding Kit
- Multi-Piece Window Trim Kit

Accessories:

- [1] Three (3) 24" Fine Finished Stainless Steel Grab Bars
- [2] 24" x 16" Four-Legged Foldup Seat, 500 lb. cap
- [3] 2" Chrome strainer brass drain with friction seal
- [4] Collapsible Dam Kit

Codes:

IPC, UPC, ANSI Z 124.2, NAHB, HUD, FHA

Warranty:

30 Year Limited Lifetime Warranty (on shower panels)*

*For more information please visit www.ellasbubbles.com

L Change of Level threshold has manageable 1/4" vertical rise to easily coordinate with minimum finished flooring.




Barrier Free, Roll In Shower 60" x 30" Ella Standard Plus 24 Accessories

1. 2. 3. 4. Round End Cap Collapsible Dam Four Legged Foldup Seat (500 lbs. Weight Capacity) Collapsible Rubber Dam White PVC with End Caps Fine Brushed Stainless Steel 2" Chrome Strainer Concealed Flange Grab Bars Brass Drain with Friction Seal



Barrier Free, Roll In Shower 60" x 30" 6030 BF 5P 1.0 - Left or Right Drain *Left Drain Shown

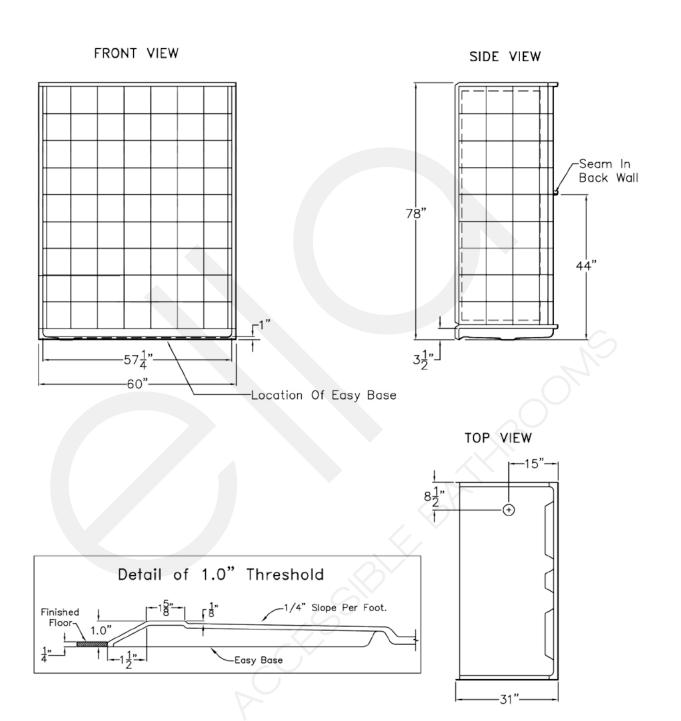

In an effort to continually improve our product, specifications and configurations are subject to change without notice. Before ordering or installing, consider future access to essential equipment. Due to the nature of the materials, dimensions may vary ± 1/2".




Barrier Free, Roll In Shower Features

ACCESSIBLE BATHROOMS

STRENGTH

Wood & Steel Reinforced Walls




Twice the weight and twice the raw materials used in the construction of our showers than listed by any of our competitors.

Wood reinforced core walls and high density base. Metal conduit around perimeter of EACH panel for added strength.

ADAPTABILITY

Customized Accessory Placement



SHOWER DOOR FRIENDLY

Your choice: Curtain or Door

Square corners in Ella shower construction allow for framed or frameless shower doors to be installed.



Image for Illustration only

FRONT SIDE INSTALLATION

Aluminum Pin and Slot System for a contractor friendly front side installation.

An installation may be finished in a fraction of the time. No more need to get behind the panels to bolt large panels together.



AVAILABILITY

Your Project won't be held up

Ella showers are manufactured, inspected and shipped directly from the factory within 5 - 7 business days.

Rush orders are available upon request (white only).


No order is too big or small.

SMART PACKING

Multi-piece Shower in a Box



In stock for Rapid Ship

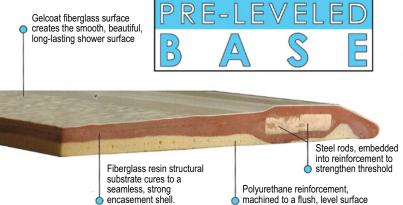

Threshold Height

Finished Floor

The barrier free threshold height (C) varies due to shower base sizes and floor drain location. The shower base is designed to assure the correct water flow into the floor drain. The threshold height size is located at the end of each shower model number.

Example: 6030 BF 5P .75 shows 0.75 of an inch C = $\frac{3}{4}$ " threshold height.