

# Low Threshold Shower 60" x 32" **Ella Standard Plus 24** - Left or Right Seat

ACCESSIBLE BATHROOMS



Model # 6032 SH IS 3P 4.0 L-WH SP24 6032 SH IS 3P 4.0 R-WH SP24 6032 SH IS 3P 4.0 L-BN SP24 6032 SH IS 3P 4.0 R-BN SP24

6032 SH IS 3P 4.0 L-B SP24 6032 SH IS 3P 4.0 R-B SP24

**Ella Standard Plus 24 Accessories** (below): Hansgrohe & Ponte Giulio are optional

hansgrohe

PONTE GIULIO creating solutions

German Engineering

Italian Design

Outside Dimensions: 33" W x 60" L x 77" HSeat Dimensions: 22" W x 18.5" L x 21" HShipping Dimensions: 48" W x 63" L x 40" H

Shipping Weight: 300 lbs. Net Weight: 290 lbs. Threshold Height: 4"

#### **Package Options:**

- White (W), Bone (BN) or Biscuit (B) Shower Panels
- Left or Right Seat
- Standard (no fixtures), Standard Plus 24, Standard Plus 36 or Freedom
- Prestige (premium fixtures)
- Flange Trim Molding Kit
- Multi-Piece Window Trim Kit

#### Panels:

Shower Base	.33"	W	Χ	60"	L	Χ	28"	Н
Side Wall Panel Left	33"	W	Х	30"	L	X	49"	Н
Side Wall Panel Right	33"	W	Х	30"	L	X	49"	Н

#### Features:

- Premium marine grade gel-coat, three piece shower with 6" classic tile pattern design and diamond accent
- Wood reinforced walls for placing grab bars and seats anywhere (not dependent on stud locations)
- Easy shower wall assembly pin-lock system allowing front side installation
- Precision fit wall panel seams (match into grout pattern)
- Grip-Sure<sup>™</sup> floor texture
- Self supporting, pre-leveled shower base (no mudset required)
- Shower door friendly (squared corners allow door installations)
- Ships pre-assembled, heavy duty crating protects product in transit

#### Accessories:

- Three (3) 24" Fine Finished Stainless Steel Grab Bars
- 2" Chrome strainer brass drain with friction seal





#### Codes:

IPC, UPC, ANSI Z 124.2, NAHB, HUD, FHA

#### Warranty:


30 Year Limited Lifetime Warranty (on shower panels)\*

\*For more information please visit www.ellasbubbles.com



# Low Threshold Shower 60" x 32" 6032 SH IS 3P 4.0 - Left or Right Seat \*Left Seat Shown

\*Left Seat Show

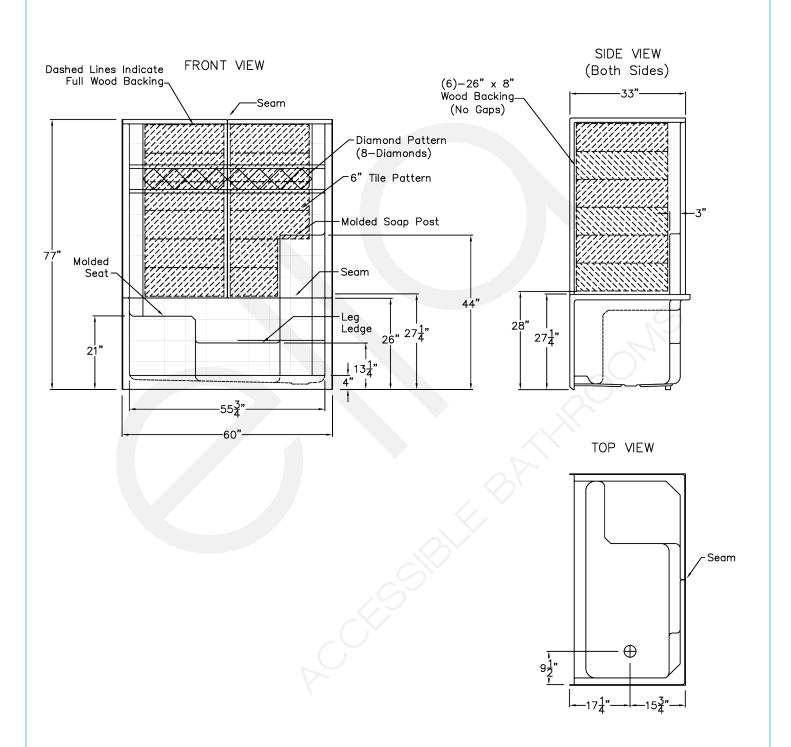

#### Disclaimer

In an effort to continually improve our product, specifications and configurations are subject to change without notice. Before ordering or installing, consider future access to essential equipment. Due to the nature of the materials, dimensions may vary  $\pm 1/2$ ".




# Low Threshold Shower 60" x 32" **Ella Standard** Features

ACCESSIBLE BATHROOMS

#### **STRENGTH**

Wood & Steel Reinforced Walls



Fiberglass resin structural substrate cures to a seamless strong encasement.

All panels are backed with 3/8" wood, accessories can be installed anywhere.

Premium Marine-grade Gel-coat fiberglass surface for beautiful. long-lasting shower surface.


Twice the weight and twice the raw materials used in the construction of our showers than listed by any of our competitors.

Wood reinforced core walls and high density base.

### **ADAPTABILITY**

**Customized Accessory Placement** 

The wood reinforced core walls allow the fixtures to be installed right onto the wall studs by eliminating the need for a drywall backing.



## SHOWER DOOR FRIENDLY

Your choice: Curtain or Door

Square corners in Ella shower construction allow for framed or frameless shower doors to be installed.




Image for Illustration only

# FRONT SIDE INSTALLATION

Aluminum Pin and Slot System for a contractor friendly front side installation.

An installation may be finished in a fraction of the time. No more need to get behind the panels to bolt large panels together.



## **AVAILABILITY**

Your Project won't be held up

Ella showers are manufactured, inspected and shipped directly from the factory within 5 - 7 business days.

Rush orders are available upon request (white only).


No order is too big or small.

**SMART PACKING** 



In stock for Rapid Ship

# LOW THRESHOLD DETAILS

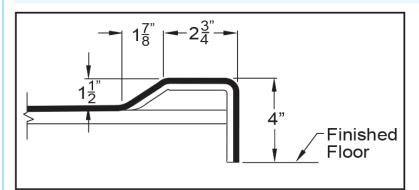

The Theshold Dimensions will vary according to the different low threshold shower models.

Please refer to the Ella Price List for more details.

Example: 6032 SH 1S 3P 4.0