



California Faucets®

Huntington™

Single Hole Lavatory Faucet

Features


- Over 30 finishes including 11 PVD finishes
- All brass construction
- Single handle operation cartridge with ceramic disc
- Flexible connections for easy installation
- 4-9/16" spout reach
- Flush mount aerator insert
- Maximum flow rate: 1.5 gpm (5.7 L/m)
- See www.calfaucets.com for complete series selection

Codes/Standards Applicable


Specified model meets or exceeds the following:

- ASME A112.18.1-2005/CSA B125.1-05
- NSF 61
- ADA
- CA & VT Lead Plumbing Law

CF-4201-1

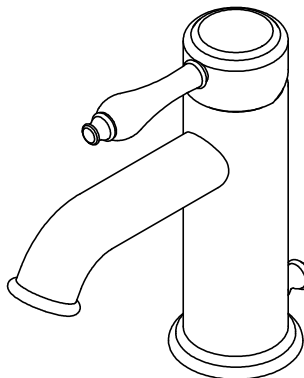

CF-4201-1-HXX
(XX = Optional Series Handle)

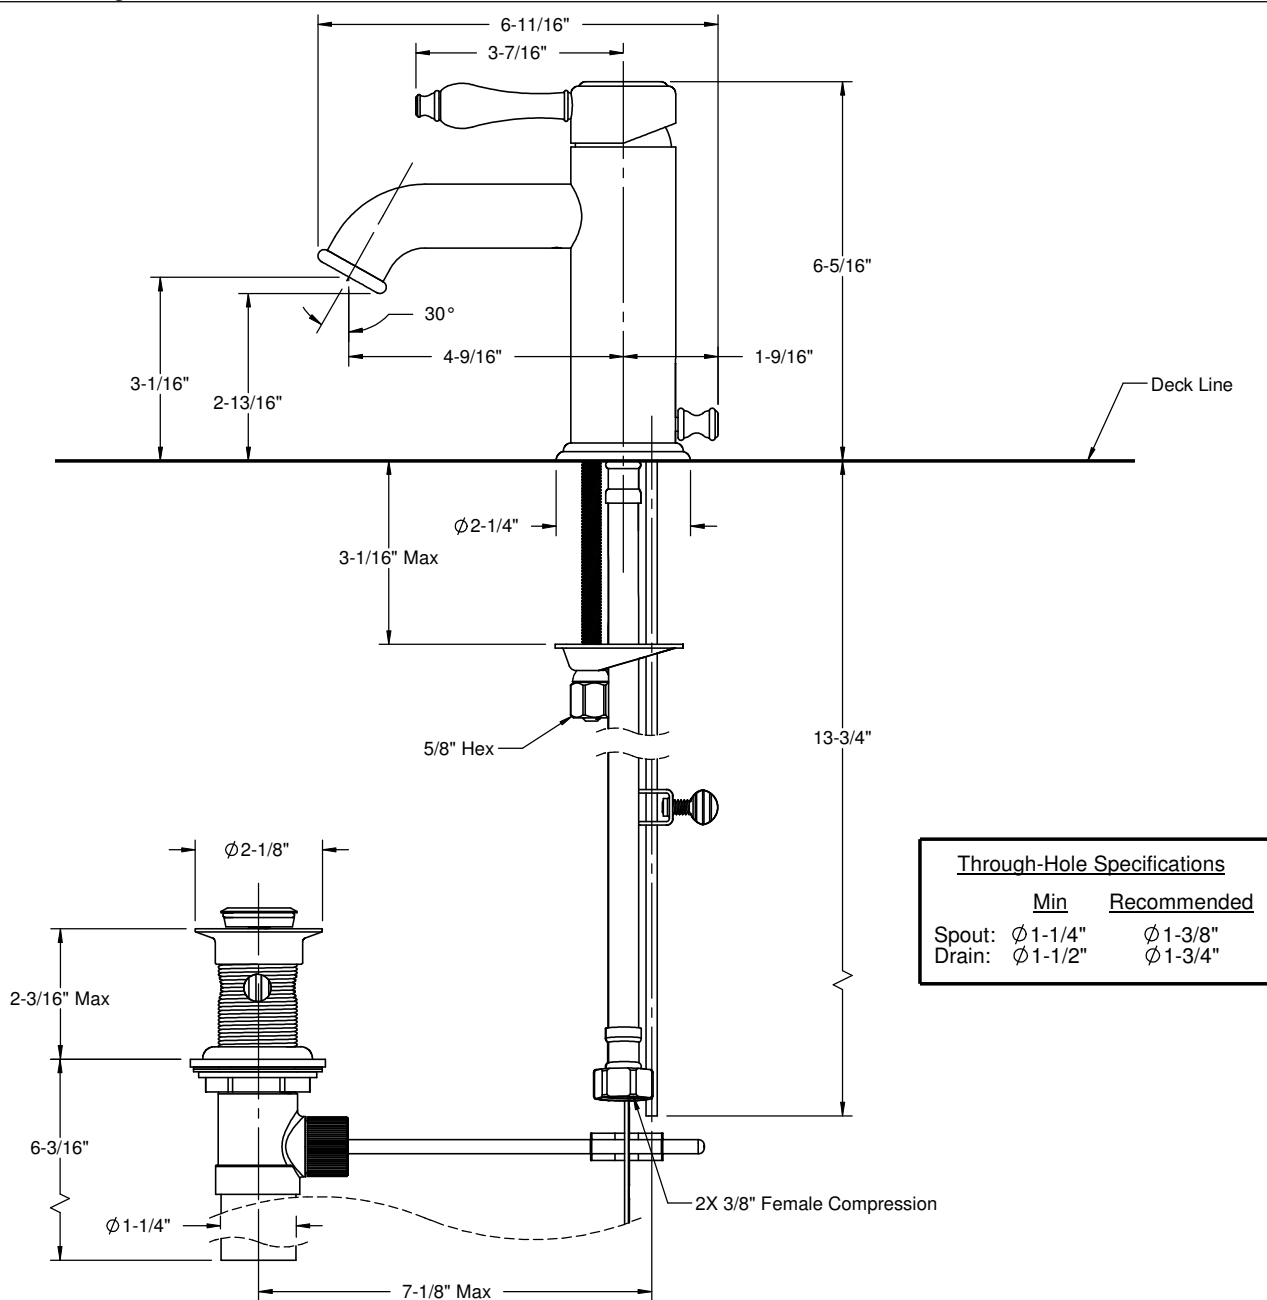

Through-Hole Specifications

	Min	Recommended
Spout: $\phi 1-1/4"$	$\phi 1-3/8"$	$\phi 1-3/8"$
Drain: $\phi 1-1/2"$	$\phi 1-3/4"$	$\phi 1-3/4"$

Dimensions Shown to Nearest 1/16"




California Faucets®


Huntington™

Single Hole Lavatory Faucet


CF-4201-1-H33

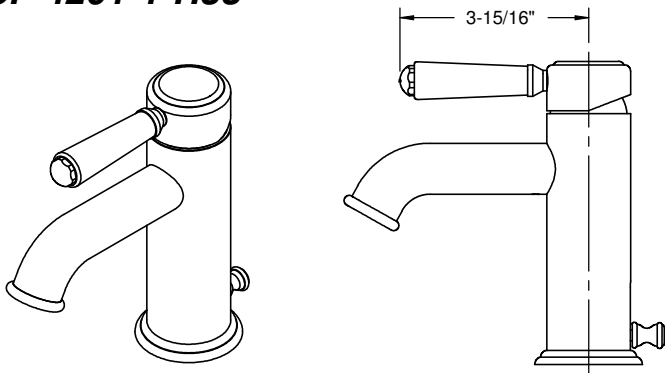


CF-4201-1-H35

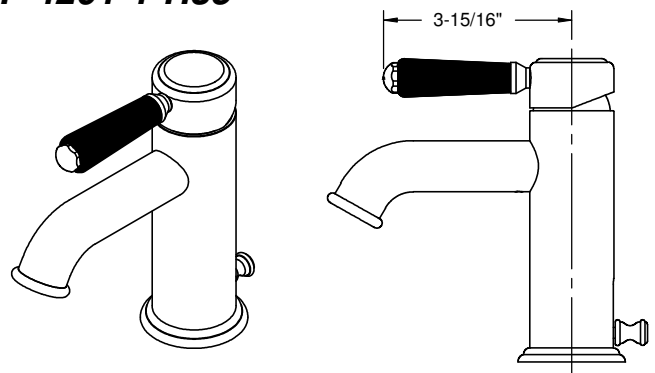


CF-4201-1-H40

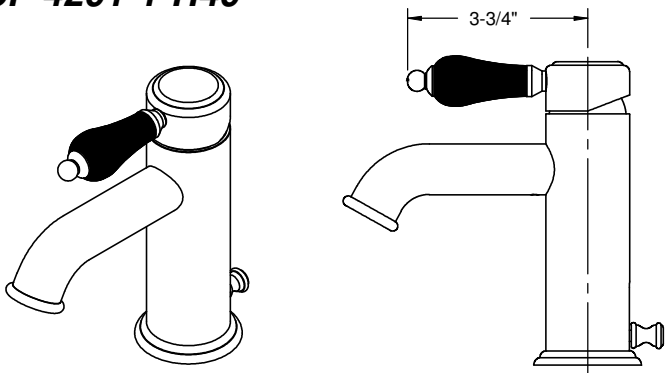


CF-4201-1-H55

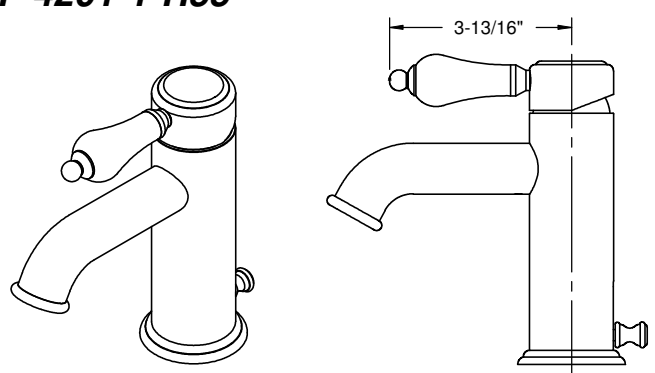


CF-4201-1-H64

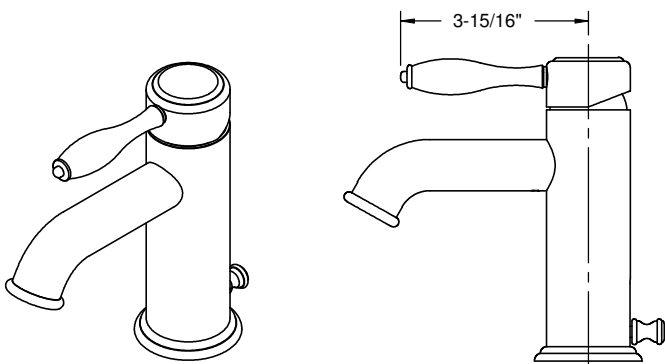

CF-4201-1-H68

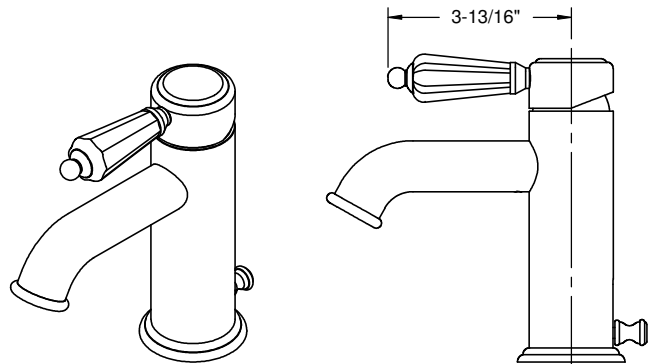

CF-4201-1-CLEV

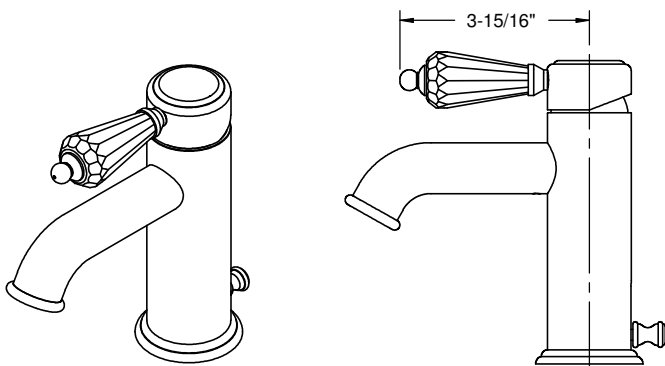

Dimensions Shown to Nearest 1/16"