

INFINITY 4 – INFINITY SERIES

inches (mm)

60 x 60 x 29 1/2 (1525 x 1525 x 750) • Fax on Demand #1289

AIR-WHIRLPOOL MODEL #A14INF6060A



AQUATIC ADVANTAGE

- National distribution
- 6 manufacturing facilities
- Private fleet
- Centralized customer service
- Field support
- 24-hour fax-on-demand

FEATURES (ALL MODELS)

- Extra-soft magnetic comfort pillow
- Fastfill waterfall spout (some models available without spout)
- Chromatherapy
- Deep bathing well with contoured seating (most models)
- Slip-resistant floor
- Sculptured arm rests
- Adjustable metal base
- Quiet pad anti-vibration pump mount
- Lucite® cast acrylic surface
- Factory run-tested
- Wood shipping crate
- Limited lifetime warranty
- UL and IAPMO listed

OPTIONS

- Cable drive waste & overflow: Chrome, Oil Rubbed Bronze, Polished Brass, Brushed Nickel, Color Matched (Biscuit, Bone, White)
- Metallic Finish: (jets and suction fittings) Chrome, Polished Brass, Brushed Nickel

SYSTEMS

WHIRLPOOL

- 17 whirlpool hydrotherapy jets including:
 - 12-jet shiatsu back massage system
 - Dual-port high-flow spinning jets
 - High-flow directional jets
- 1.75 HP run-dry safe pump
- 1.5 Kw Inline maintenance heater
- Digital electronic control system with custom preset capability
- Shiatsu electronic control panel with pre-programmed jet sequencer

AIR BATH

- Air bath system featuring concealed in-floor air jets with check valves
- Variable-speed, heated-air blower with automated purge-and-dry cycle

COLOR & TRIM OPTIONS

| Stock | Premium |
|----------------|------------------------|
| Almond (C, M) | Black (C, M) |
| Bone (C, M) | Cashmere (M) |
| Biscuit (C, M) | Mexican Sand (M) |
| White (C, M) | Red (M) |
| | Sandbar (M) |
| | Sterling Silver (C, M) |

C = Color Matched Trim
M = Metallic Trim (Brushed Nickel, Chrome, Polished Brass)



Two Person Bath





INFINITY 4

60 x 60 x 29 1/2 (1525 x 1525 x 750)
inches (mm)



This unit has a 3/4" female waterfall fill spout connection.

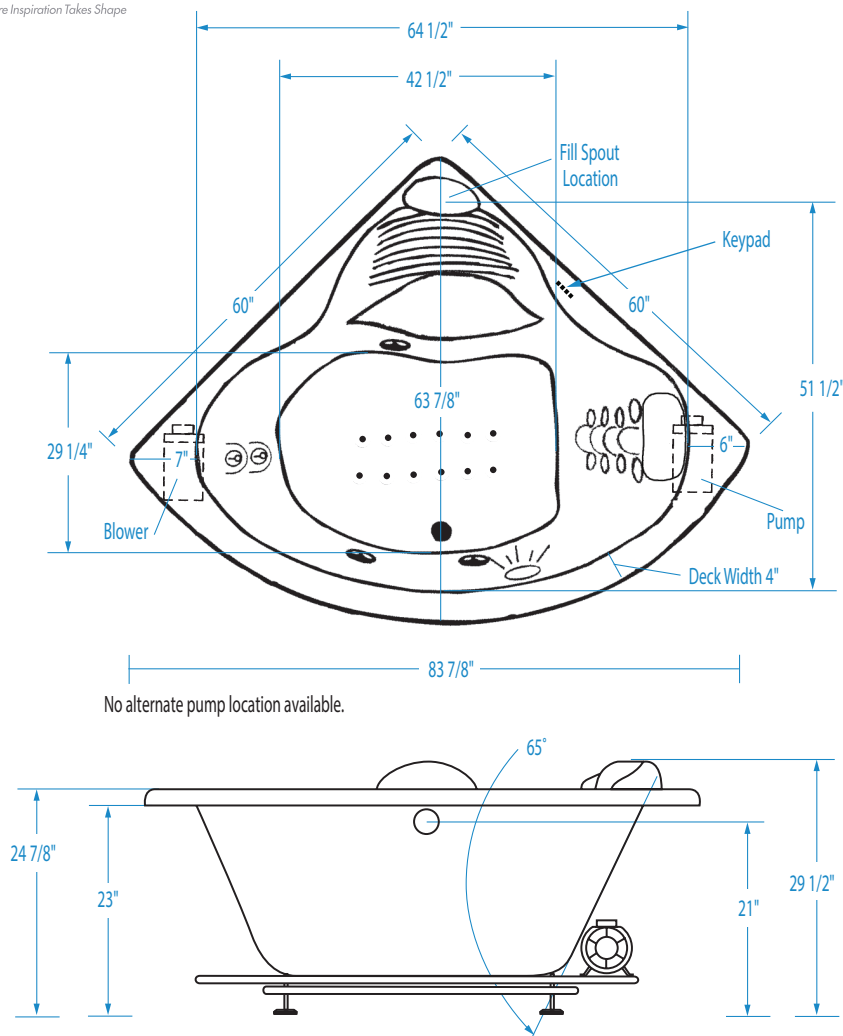

FEATURES lbs (kg) Dimensional Tolerance $\pm 3/8"$. Dimensions needed for site preparation should be measured from the unit. Aquatic assumes no responsibility for preparatory work.

| Type and Model # | Material | Jets | Pump | Air System | Blower | Heater | Controls | Drain | Pkg. Wt. |
|----------------------------|----------|------|---------|------------|----------------|---------------|------------|--------------|-----------|
| Air-whirlpool #AI4INF6060A | Acrylic | 17 | 1.75 HP | Injector | Variable speed | 1.5 kw Inline | Electronic | Center Front | 518 (235) |

DIMENSIONS inches (mm)

| Width Overall / Net | Depth Overall / Net | Height Overall / Net | Skirt Height |
|------------------------|------------------------|-------------------------|-----------------|
| 60 (1525) | 60 (1525) | 29 1/2 (750) | - |

SUMP DATA inches (mm)

| Capacity to Overflow gal (ltr) | Min. Operating Capacity gal (ltr) | WIDTH @ centerline | | DEPTH @ centerline | |
|--------------------------------------|---|--------------------|---------------|--------------------|--------------|
| | | Top | Bottom | Top | Bottom |
| 132 (500) | 92 (348) | 64 1/2 (1640) | 42 1/2 (1080) | 51 1/2 (1310) | 29 1/4 (740) |

PLUMBING DIMENSIONS inches (mm)

| A | B | Drain Diameter / Clearance |
|--------|--------------|-------------------------------|
| 3 (75) | 11 3/4 (300) | 2 (50) / 2 3/4 (70) |

ELECTRICAL DATA

| Component | Specification | Requirement |
|---------------|------------------------|---|
| Pump | 1.75 HP; 12 AMP; 120 V | 15 AMP 1 pole, separate circuit, Class A GFCI |
| Inline Heater | 1.5 kW; 12 AMP; 120 V | 15 AMP 1 pole, separate circuit, Class A GFCI |
| Blower | 1.0 HP; 9.5 AMP; 120 V | 15 AMP 1 pole, separate circuit, Class A GFCI |

NOTES:

1) Where applicable, utilize cut-out templates packed with unit for deck cutouts.

2) 16 x 16 (405 x 405) minimum access required at pump/blower location(s).