

# SERENITY 25 – SERENITY SERIES

inches (mm)

71 ¼ x 41 ¾ x 25 ½ (1810 x 1060 x 650) • Fax on Demand #1270

SOAKER MODEL #AI25AIR7242CFTO

AIR BATH MODEL #AI25AIR7242CF



## FEATURES

- Freestanding bath
- Deep bathing well
- Slip-resistant floor
- Lucite® cast acrylic surface
- Design styles from transitional to modern
- Limited lifetime warranty
- UL and IAPMO listed

## OPTIONS

- Comfort pillow:  
Biscuit, Black, White
- Freestanding waste & overflow:  
Chrome, Oil Rubbed Bronze,  
Polished Brass, Brushed Nickel,  
White

## AQUATIC ADVANTAGE

- National distribution
- Centralized customer service
- 6 manufacturing facilities
- Field support
- Private fleet
- 24-hour fax-on-demand

## COLOR & TRIM OPTIONS

Stock	Premium
Almond	Black
Bone	Cashmere
Biscuit	Mexican Sand
White	Red
	Sandbar
	Sterling Silver

## AVAILABLE SYSTEM

### AIR BATH



- Perimeter air channel lined with antimicrobial coating
- Variable-speed, heated-air blower and automated purge-and-dry cycle and water sensors
- Electronic control with wave and pulse features
- Factory run-tested

Note: The interior of bathing well and outside of bathing well can each be specified in a different color.



# SERENITY 25

71 1/4 x 41 3/4 x 25 1/2 (1810 x 1060 x 650)  
inches (mm)

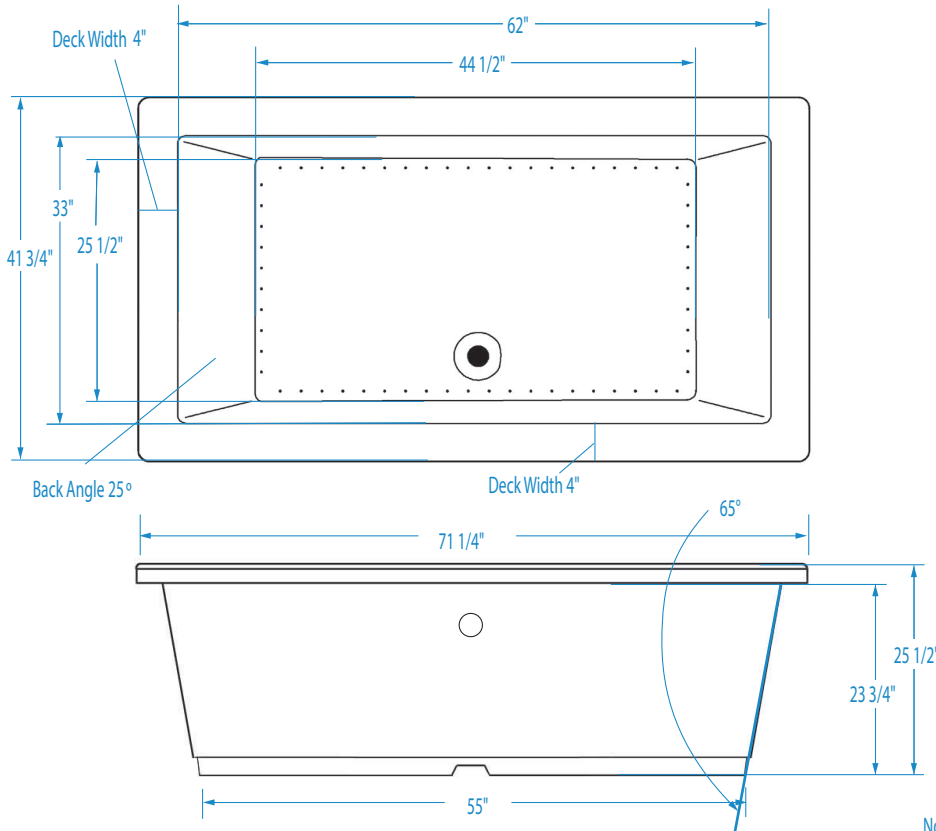

Note: Low profile pedestal prohibits use of decorative drain pipe flange.

**FEATURES** lbs (kg) Dimensional Tolerance  $\pm 3/8"$ . Dimensions needed for site preparation should be measured from the unit. Aquatic assumes no responsibility for preparatory work.

Type and Model #	Material	System	Powered By	Heater	Controls	Drain	Pkg. Wt.
Soaker #AI25AIR7242CFTO	Acrylic	—	—	—	—	Center Front	275 (125)
Air Bath #AI25AIR7242CF	Acrylic	Air channel	Variable speed blower	Integrated	Electronic	Center Front	305 (139)

## DIMENSIONS inches (mm)

Width Overall / Net	Depth Overall / Net	Height Overall / Net	Skirt Height
71 1/4 (1810)	41 3/4 (1060)	25 1/2 (650)	—

## SUMP DATA inches (mm)

Capacity to Overflow gal (ltr)	Min. Operating Capacity gal (ltr)	WIDTH @ centerline		DEPTH @ centerline	
		Top	Bottom	Top	Bottom
150 (568)	—	62 (1575)	49 1/2 (1260)	33 (840)	25 1/2 (650)

## PLUMBING DIMENSIONS inches (mm)

A	B	Drain Diameter / Clearance
3 1/4 (85)	12 (305)	

## ELECTRICAL DATA

Component	Specification	Requirement
Heated Blower (Air Bath)	10.5 AMP; 120V	15 AMP; 120V, separate circuit; Class A GFCI

### NOTES:

1) Where applicable, utilize cut-out templates packed with unit for deck cutouts.

2) 16 x 16 (405 x 405) minimum access required at pump/blower location(s).

Each Serenity air bath is equipped with an air heating system to raise the temperature of the air entering the bath. This air temperature will be lower than the bathing temperature of the water, but will help reduce rapid decrease in water temperature. In addition, the air coming from the air jets will feel cool against the skin. This system does not heat the water.

# SERENITY


## PUMP/BLOWER LOCATIONS

### TECHNICAL SPECIFICATIONS

Air Bath • HotSoak • DriftBath

#### AIR BATH

##### Center Drain Models




##### End Drain Models




#### HOTSOAK

##### Center Drain Models




##### End Drain Models




#### DRIFTBATH

##### Center Drain Models



##### End Drain Models



##### Center Drain Models

