
Sutter Place 52" Collection 52 Inch Sutter Place Fan AP

339011AP (Antique Pewter)

Dimensions

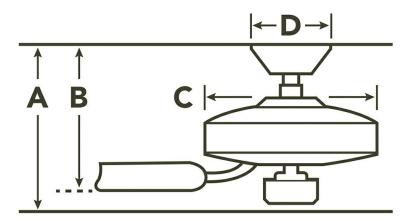

| Downrod | Α | В | С | D |
|----------------|-------|-------|-------|------|
| 1.00 OD X 4.00 | 12.25 | 10.75 | 12.00 | 5.25 |
| FLUSH MOUNT | 9.50 | 8.00 | 12.00 | 5.25 |

Available Finishes

| Finish | Fixture | Glass | Blade 1 | Blade 2 |
|--------|---------|-------|---------|---------|
|--------|---------|-------|---------|---------|

| Project Name: | |
|---------------|--|
| Location: | |
| Туре: | |
| Qty: | |
| Comments: | |

Product Information

| Product ID | 339011AP | | | |
|--------------|-----------------------------|--|--|--|
| Finish | Antique Pewter | | | |
| Blade Finish | Light Cherry/Dark Cherry | | | |
| Collection | Sutter Place 52" Collection | | | |

Airflow, Power and Efficiency

| Speed | RPM | CFM | CFM/ Watt | Amps | Watts |
|-------|-----|------|-----------|------|-------|
| High | 160 | 4500 | 76 | .49 | 59 |
| Med | 113 | 3196 | 114 | .35 | 28 |
| Low | 62 | 1602 | 169 | .2 | 10 |

Specifications

| Number of Blades | 5 |
|---------------------------|--------------------------|
| Blades Included | Yes |
| Blade Pitch | 12 Degrees |
| Blade Sweep | 52" |
| Blades Reversible | Yes |
| Blade Material | WOOD |
| Optional Blades Available | No |
| Downrod 1 | 1.00 OD X 4.00 |
| Downrod 2 | FLUSH MOUNT |
| Primary Control System | Pull Chain |
| Remote Included | No |
| Wall Control Included | No |
| Low Ceiling Adaptable | Yes, Dual Mount Included |
| Lead Wire Length | 78.00" |
| Motor Size | 153MM X 15MM |
| Motor Type | AC |
| | |

Downlight

Optional Light Kit Available

Safety Listings & Certifications

| Safety Rated | Dry |
|--------------|--------------------------|
| Warranty | www.kichler.com/warranty |

Installation

The electrical junction box and support structure must be securely mounted and capable of reliably supporting a minimum of 50 pounds.

Installation requirements

1) Information provided is subject to change without notice.

All values are design or typical values when measured under Toll free: 866.558.5706 or kichler.com 2) Incandescent Equivalent: The incandescent equivalent as presented is an approximate number and is for reference only



Sutter Place 52" Collection 52 Inch Sutter Place Fan AP

339011AP (Antique Pewter)

| Antique Pewter | 339011AP | N/A | LIGHT CHERRY | BLACK CHERRY |
|------------------------|-----------|-----|--------------------|--------------------|
| Oil Brushed Bronze | 339011OBB | N/A | WALNUT | MEDIUM CHERRY |
| Satin Natural White | 339011SNW | N/A | SATIN NAT WHITE | SATIN NAT WHITE |
| Olde Bronze | 339011OZ | N/A | WALNUT | MEDIUM CHERRY |
| Matte White | 339011MWH | | MATTE WHITE | MATTE WHITE |
| Sterling Gold | 339011SGD | | WALNUT | STERLING GOLD |
| Natural Brass | 339011NBR | | MEDIUM CHERRY | DARK CHERRY |

| Туре: | |
|---|---|
| Qty: | |
| Comments: | |
| | |
| | Use only ETL/UL listed electrical junction boxes marked ""For Fan Support"" |
| Electrical Requirements | 120V 60Hz AC |
| Hanging Weight | 17 LBS |
| Minimum Distance Between Bottom Of Fan Blade To Floor | 7.5 feet |
| | |

Project Name: ____ Location: _____


| Product ID | Descr |
|------------|--------------------------------|
| 337001WH | Universal Remote Control |
| 337012ALM | 4 Speed Fan Slide Control |
| 337012IV | 4 Speed Fan Slide Control |
| 337012WH | 4 Speed Fan Slide Control |
| 337214 | Limited Function Cooltouch |
| 370039MUL | Wall Control System L-Function |
| 370040 | 4 Speed Rotary Switch 10 AMP |
| 3R400AP | CoolTouch Control System R400 |

Sutter Place 52" Collection 52" Sutter Place Ceiling Fan MWH

339011MWH



Dimensions

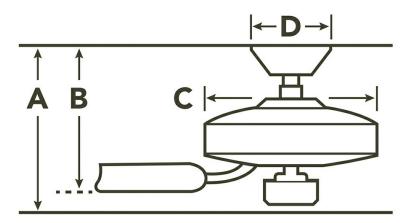

| Downrod | Α | В | С | D |
|----------------|-------|-------|-------|------|
| 1.00 OD X 4.00 | 12.25 | 10.75 | 12.00 | 5.25 |
| FLUSH MOUNT | 9.50 | 8.00 | 12.00 | 5.25 |

Available Finishes

| Project Name: |
|---------------|
| Location: |
| Туре: |
| Qty: |
| Comments: |

Product Information

| Product ID | 339011MWH |
|--------------|-----------------------------|
| Blade Finish | Matte White/Matte White |
| Collection | Sutter Place 52" Collection |

Airflow, Power and Efficiency

| Speed | RPM | CFM | CFM/ Watt | Amps | Watts |
|-------|-----|------|-----------|------|-------|
| High | 160 | 4500 | 76 | .49 | 59 |
| Med | 113 | 3196 | 114 | .35 | 28 |
| Low | 62 | 1602 | 169 | .2 | 10 |

Specifications

| opodinoationo | |
|---------------------------|--------------------------|
| Number of Blades | 5 |
| Blades Included | Yes |
| Blade Pitch | 12 Degrees |
| Blade Sweep | 52" |
| Blades Reversible | Yes |
| Blade Material | WOOD |
| Optional Blades Available | No |
| Downrod 1 | 1.00 OD X 4.00 |
| Downrod 2 | FLUSH MOUNT |
| Primary Control System | Pull Chain |
| Remote Included | No |
| Wall Control Included | No |
| Low Ceiling Adaptable | Yes, Dual Mount Included |
| Lead Wire Length | 78.00" |
| Motor Size | 153MM X 15MM |
| Motor Type | AC |
| | |

Downlight

Optional Light Kit Available No

Safety Listings & Certifications

| Safety Rated | Dry |
|--------------|--------------------------|
| Warranty | www.kichler.com/warranty |

Installation

The electrical junction box and support structure must be securely mounted and capable of reliably supporting a minimum of 50 pounds.

Installation requirements



7711 East Pleasant Valley Road Cleveland, Ohio 44131-8010 Toll free: 866.558.5706 or kichler.com

Notes

Information provided is subject to change without notice.
 All values are design or typical values when measured under laboratory conditions.

Incandescent Equivalent: The incandescent equivalent as presented is an approximate number and is for reference only.



Sutter Place 52" Collection 52" Sutter Place Ceiling Fan MWH

339011MWH

| Finish | Fixture | Glass | Blade 1 | Blade 2 |
|------------------------|-----------|-------|--------------------|--------------------|
| Antique Pewter | 339011AP | N/A | LIGHT CHERRY | BLACK CHERRY |
| Oil Brushed Bronze | 339011OBB | N/A | WALNUT | MEDIUM CHERRY |
| Satin Natural White | 339011SNW | N/A | SATIN NAT WHITE | SATIN NAT WHITE |
| Olde Bronze | 339011OZ | N/A | WALNUT | MEDIUM CHERRY |
| Matte White | 339011MWH | | MATTE WHITE | MATTE WHITE |
| Sterling Gold | 339011SGD | | WALNUT | STERLING GOLD |
| Natural Brass | 339011NBR | | MEDIUM CHERRY | DARK CHERRY |

| Qty: | |
|--|---|
| Comments: | |
| | |
| | Use only ETL/UL listed electrical junction boxes marked ""For Fan Support"" |
| Electrical Requirements | 120V 60Hz AC |
| Hanging Weight | 17 LBS |
| Minimum Distance Between Bottom Of Fan Blade To | 7.5 feet |

Project Name:

Location: ___

Туре: ___


| Product ID | Descr |
|------------|--------------------------------|
| 337001WH | Universal Remote Control |
| 337012ALM | 4 Speed Fan Slide Control |
| 337012IV | 4 Speed Fan Slide Control |
| 337012WH | 4 Speed Fan Slide Control |
| 337214 | Limited Function Cooltouch |
| 370039MUL | Wall Control System L-Function |
| 370040 | 4 Speed Rotary Switch 10 AMP |
| 3R400AP | CoolTouch Control System R400 |

Sutter Place 52" Collection 52" Sutter Place Ceiling Fan NBR

339011NBR (Natural Brass)



Dimensions

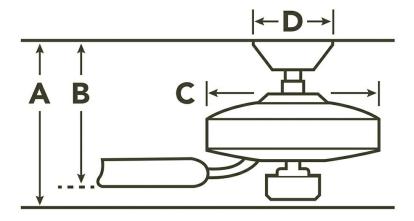

| Downrod | Α | В | С | D |
|----------------|-------|-------|-------|------|
| 1.00 OD X 4.00 | 12.25 | 10.75 | 12.00 | 5.25 |
| FLUSH MOUNT | 9.50 | 8.00 | 12.00 | 5.25 |

Available Finishes

| Finish | Fixture | Glass | Blade 1 | Blade 2 |
|--------|---------|-------|---------|---------|
|--------|---------|-------|---------|---------|

| Project Name: | |
|---------------|--|
| Location: | |
| Туре: | |
| Qty: | |
| Comments: | |

Product Information

| Product ID | 339011NBR |
|--------------|-----------------------------|
| Finish | Natural Brass |
| Blade Finish | Medium Cherry/Dark Cherry |
| Collection | Sutter Place 52" Collection |

Airflow, Power and Efficiency

| | | | | y | | | | |
|--|-------|-----|------|-----------|------|-------|--|--|
| | Speed | RPM | CFM | CFM/ Watt | Amps | Watts | | |
| | High | 160 | 4500 | 76 | .49 | 59 | | |
| | Med | 113 | 3196 | 114 | .35 | 28 | | |
| | Low | 62 | 1602 | 169 | .2 | 10 | | |

Specifications

| Number of Blades | 5 |
|---------------------------|--------------------------|
| Blades Included | Yes |
| Blade Pitch | 12 Degrees |
| Blade Sweep | 52" |
| Blades Reversible | Yes |
| Blade Material | WOOD |
| Optional Blades Available | No |
| Downrod 1 | 1.00 OD X 4.00 |
| Downrod 2 | FLUSH MOUNT |
| Primary Control System | Pull Chain |
| Remote Included | No |
| Wall Control Included | No |
| Low Ceiling Adaptable | Yes, Dual Mount Included |
| Lead Wire Length | 78.00" |
| Motor Size | 153MM X 15MM |
| Motor Type | AC |
| | |

Downlight

Optional Light Kit Available

Safety Listings & Certifications


| Safety Rated | Dry | | |
|--------------|--------------------------|--|--|
| Warranty | www.kichler.com/warranty | | |

Installation

The electrical junction box and support structure must be securely mounted and capable of reliably supporting a minimum of 50 pounds.

Installation requirements

1) Information provided is subject to change without notice.





7711 East Pleasant Valley Road Cleveland, Ohio 44131-8010 Toll free: 866.558.5706 or kichler.com



Sutter Place 52" Collection 52" Sutter Place Ceiling Fan NBR

339011NBR (Natural Brass)

| Antique Pewter | 339011AP | N/A | LIGHT CHERRY | BLACK CHERRY |
|------------------------|-----------|-----|--------------------|--------------------|
| Oil Brushed Bronze | 339011OBB | N/A | WALNUT | MEDIUM CHERRY |
| Satin Natural White | 339011SNW | N/A | SATIN NAT WHITE | SATIN NAT WHITE |
| Olde Bronze | 339011OZ | N/A | WALNUT | MEDIUM CHERRY |
| Matte White | 339011MWH | | MATTE WHITE | MATTE WHITE |
| Sterling Gold | 339011SGD | | WALNUT | STERLING GOLD |
| Natural Brass | 339011NBR | | MEDIUM CHERRY | DARK CHERRY |

| Type: | |
|---|---|
| Qty: | |
| Comments: | |
| | |
| | Use only ETL/UL listed electrical junction boxes marked ""For Fan Support"" |
| Electrical Requirements | 120V 60Hz AC |
| Hanging Weight | 17 LBS |
| Minimum Distance Between Bottom Of Fan Blade To Floor | 7.5 feet |
| | |

Project Name: ____ Location: _____


| Product ID | Descr |
|------------|--------------------------------|
| 337001WH | Universal Remote Control |
| 337012ALM | 4 Speed Fan Slide Control |
| 337012IV | 4 Speed Fan Slide Control |
| 337012WH | 4 Speed Fan Slide Control |
| 337214 | Limited Function Cooltouch |
| 370039MUL | Wall Control System L-Function |
| 370040 | 4 Speed Rotary Switch 10 AMP |
| 3R400AP | CoolTouch Control System R400 |

Sutter Place 52" Collection 52 Inch Sutter Place Fan OBB

339011OBB (Oil Brushed Bronze)



Dimensions

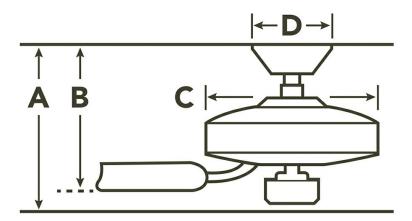

| Downrod | Α | В | С | D |
|----------------|-------|-------|-------|------|
| 1.00 OD X 4.00 | 12.25 | 10.75 | 12.00 | 5.25 |
| FLUSH MOUNT | 9.50 | 8.00 | 12.00 | 5.25 |

Available Finishes

| Finish | Fixture | Glass | Blade 1 | Blade 2 |
|--------|---------|-------|---------|---------|
|--------|---------|-------|---------|---------|

| Project Name: | | | | |
|---------------|----------|--|--|--|
| Location: | ocation: | | | |
| Туре: | | | | |
| Qty: | | | | |
| Comments: | | | | |

Product Information

| Product ID | 339011OBB |
|--------------|-----------------------------|
| Finish | Oil Brushed Bronze |
| Blade Finish | Walnut/Medium Cherry |
| Collection | Sutter Place 52" Collection |

Airflow, Power and Efficiency

| , | , retrei and Emerency | | | | |
|-------|-----------------------|------|-----------|------|-------|
| Speed | RPM | CFM | CFM/ Watt | Amps | Watts |
| High | 160 | 4500 | 76 | .49 | 59 |
| Med | 113 | 3196 | 114 | .35 | 28 |
| Low | 62 | 1602 | 169 | .2 | 10 |

Specifications

| Number of Blades | 5 |
|---------------------------|--------------------------|
| Blades Included | Yes |
| Blade Pitch | 12 Degrees |
| Blade Sweep | 52" |
| Blades Reversible | Yes |
| Blade Material | WOOD |
| Optional Blades Available | No |
| Downrod 1 | 1.00 OD X 4.00 |
| Downrod 2 | FLUSH MOUNT |
| Primary Control System | Pull Chain |
| Remote Included | No |
| Wall Control Included | No |
| Low Ceiling Adaptable | Yes, Dual Mount Included |
| Lead Wire Length | 78.00" |
| Motor Size | 153MM X 15MM |
| Motor Type | AC |
| | |

Downlight

Optional Light Kit Available No

Safety Listings & Certifications

| Safety Rated | Dry |
|--------------|--------------------------|
| Warranty | www.kichler.com/warranty |

Installation

The electrical junction box and support structure must be securely mounted and capable of reliably supporting a minimum of 50 pounds.

Installation requirements



Kichler

Sutter Place 52" Collection 52 Inch Sutter Place Fan OBB

339011OBB (Oil Brushed Bronze)

| Antique Pewter | 339011AP | N/A | LIGHT CHERRY | BLACK CHERRY |
|------------------------|-----------|-----|--------------------|--------------------|
| Oil Brushed Bronze | 339011OBB | N/A | WALNUT | MEDIUM CHERRY |
| Satin Natural White | 339011SNW | N/A | SATIN NAT WHITE | SATIN NAT WHITE |
| Olde Bronze | 339011OZ | N/A | WALNUT | MEDIUM CHERRY |
| Matte White | 339011MWH | | MATTE WHITE | MATTE WHITE |
| Sterling Gold | 339011SGD | | WALNUT | STERLING GOLD |
| Natural Brass | 339011NBR | | MEDIUM CHERRY | DARK CHERRY |

| Туре: | |
|---|---|
| Qty: | |
| Comments: | |
| | |
| | Use only ETL/UL listed electrical junction boxes marked ""For Fan Support"" |
| Electrical Requirements | 120V 60Hz AC |
| Hanging Weight | 17 LBS |
| Minimum Distance Between Bottom Of Fan Blade To Floor | 7.5 feet |
| | |

Project Name: ____ Location: ____


| Product ID | Descr |
|------------|--------------------------------|
| 337001WH | Universal Remote Control |
| 337012ALM | 4 Speed Fan Slide Control |
| 337012IV | 4 Speed Fan Slide Control |
| 337012WH | 4 Speed Fan Slide Control |
| 337214 | Limited Function Cooltouch |
| 370039MUL | Wall Control System L-Function |
| 370040 | 4 Speed Rotary Switch 10 AMP |
| 3R400AP | CoolTouch Control System R400 |

Sutter Place 52" Collection 52 Inch Sutter Place Fan OZ

339011OZ (Olde Bronze)



Dimensions

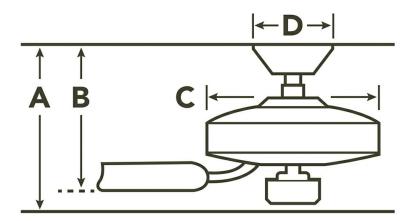

| Downrod | Α | В | С | D |
|----------------|-------|-------|-------|------|
| 1.00 OD X 4.00 | 12.25 | 10.75 | 12.00 | 5.25 |
| FLUSH MOUNT | 9.50 | 8.00 | 12.00 | 5.25 |

Available Finishes

| Finish | Fixture | Glass | Blade 1 | Blade 2 |
|--------|---------|-------|---------|---------|
|--------|---------|-------|---------|---------|

| Project Name: | |
|---------------|--|
| Location: | |
| Туре: | |
| Qty: | |
| Comments: | |

Product Information

| Product ID | 339011OZ |
|--------------|-----------------------------|
| Finish | Olde Bronze |
| Blade Finish | Walnut/Medium Cherry |
| Collection | Sutter Place 52" Collection |

Airflow, Power and Efficiency

| Speed | RPM | CFM | CFM/ Watt | Amps | Watts |
|-------|-----|------|-----------|------|-------|
| High | 160 | 4500 | 76 | .49 | 59 |
| Med | 113 | 3196 | 114 | .35 | 28 |
| Low | 62 | 1602 | 169 | .2 | 10 |

Specifications

| Number of Blades | 5 |
|---------------------------|--------------------------|
| Blades Included | Yes |
| Blade Pitch | 12 Degrees |
| Blade Sweep | 52" |
| Blades Reversible | Yes |
| Blade Material | WOOD |
| Optional Blades Available | No |
| Downrod 1 | 1.00 OD X 4.00 |
| Downrod 2 | FLUSH MOUNT |
| Primary Control System | Pull Chain |
| Remote Included | No |
| Wall Control Included | No |
| Low Ceiling Adaptable | Yes, Dual Mount Included |
| Lead Wire Length | 78.00" |
| Motor Size | 153MM X 15MM |
| Motor Type | AC |
| | |

Downlight

Optional Light Kit Available No

Safety Listings & Certifications

| Safety Rated | Dry |
|--------------|--------------------------|
| Warranty | www.kichler.com/warranty |

Installation

The electrical junction box and support structure must be securely mounted and capable of reliably supporting a minimum of 50 pounds.

Installation requirements



7711 East Pleasant Valley Road Cleveland, Ohio 44131-8010 Toll free: 866.558.5706 or kichler.com

Notes

Information provided is subject to change without notice.

All values are design or typical values when measured under laboratory conditions.

Incandescent Equivalent: The incandescent equivalent as presented is an approximate number and is for reference only



Sutter Place 52" Collection 52 Inch Sutter Place Fan OZ

339011OZ (Olde Bronze)

| Antique Pewter | 339011AP | N/A | LIGHT CHERRY | BLACK CHERRY |
|------------------------|-----------|-----|--------------------|--------------------|
| Oil Brushed Bronze | 339011OBB | N/A | WALNUT | MEDIUM CHERRY |
| Satin Natural White | 339011SNW | N/A | SATIN NAT WHITE | SATIN NAT WHITE |
| Olde Bronze | 339011OZ | N/A | WALNUT | MEDIUM CHERRY |
| Matte White | 339011MWH | | MATTE WHITE | MATTE WHITE |
| Sterling Gold | 339011SGD | | WALNUT | STERLING GOLD |
| Natural Brass | 339011NBR | | MEDIUM CHERRY | DARK CHERRY |

| Туре: | /pe: | | | | |
|---|---|--|--|--|--|
| Qty: | | | | | |
| Comments: | | | | | |
| | | | | | |
| | Use only ETL/UL listed electrical junction boxes marked ""For Fan Support"" | | | | |
| Electrical Requirements | 120V 60Hz AC | | | | |
| Hanging Weight | 17 LBS | | | | |
| Minimum Distance Between Bottom Of Fan Blade To Floor | 7.5 feet | | | | |
| | | | | | |

Project Name: ____ Location: _____


| Product ID | Descr |
|------------|--------------------------------|
| 337001WH | Universal Remote Control |
| 337012ALM | 4 Speed Fan Slide Control |
| 337012IV | 4 Speed Fan Slide Control |
| 337012WH | 4 Speed Fan Slide Control |
| 337214 | Limited Function Cooltouch |
| 370039MUL | Wall Control System L-Function |
| 370040 | 4 Speed Rotary Switch 10 AMP |
| 3R400AP | CoolTouch Control System R400 |

Sutter Place 52" Collection 52" Sutter Place Ceiling Fan SGD

339011SGD



Dimensions

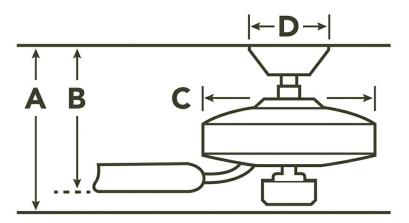

| Downrod | Α | В | С | D |
|----------------|-------|-------|-------|------|
| 1.00 OD X 4.00 | 12.25 | 10.75 | 12.00 | 5.25 |
| FLUSH MOUNT | 9.50 | 8.00 | 12.00 | 5.25 |

Available Finishes

| Project Name: _ | |
|-----------------|--|
| Location: | |
| Туре: | |
| Qty: | |
| Comments: | |

Product Information

| Product ID | 339011SGD | | |
|--------------|-----------------------------|--|--|
| Blade Finish | Walnut/Sterling Gold | | |
| Collection | Sutter Place 52" Collection | | |

Airflow, Power and Efficiency

| Speed | RPM | CFM | CFM/ Watt | Amps | Watts | |
|-------|-----|------|-----------|------|-------|--|
| High | 160 | 4500 | 76 | .49 | 59 | |
| Med | 113 | 3196 | 114 | .35 | 28 | |
| Low | 62 | 1602 | 169 | .2 | 10 | |

Specifications

| • | |
|---------------------------|--------------------------|
| Number of Blades | 5 |
| Blades Included | Yes |
| Blade Pitch | 12 Degrees |
| Blade Sweep | 52" |
| Blades Reversible | Yes |
| Blade Material | WOOD |
| Optional Blades Available | No |
| Downrod 1 | 1.00 OD X 4.00 |
| Downrod 2 | FLUSH MOUNT |
| Primary Control System | Pull Chain |
| Remote Included | No |
| Wall Control Included | No |
| Low Ceiling Adaptable | Yes, Dual Mount Included |
| Lead Wire Length | 78.00" |
| Motor Size | 153MM X 15MM |
| Motor Type | AC |

Downlight

Optional Light Kit Available No

Safety Listings & Certifications

| Safety Rated Dry | |
|------------------|------------------------|
| Warranty ww | w.kichler.com/warranty |

Installation

The electrical junction box and support structure must be securely mounted and capable of reliably supporting a minimum of 50 pounds.

Installation requirements

KICHLER

Sutter Place 52" Collection 52" Sutter Place Ceiling Fan SGD

339011SGD

| Finish | Fixture | Glass | Blade 1 | Blade 2 |
|------------------------|-----------|-------|--------------------|--------------------|
| Antique Pewter | 339011AP | N/A | LIGHT CHERRY | BLACK CHERRY |
| Oil Brushed Bronze | 339011OBB | N/A | WALNUT | MEDIUM CHERRY |
| Satin Natural White | 339011SNW | N/A | SATIN NAT WHITE | SATIN NAT WHITE |
| Olde Bronze | 339011OZ | N/A | WALNUT | MEDIUM CHERRY |
| Matte White | 339011MWH | | MATTE WHITE | MATTE WHITE |
| Sterling Gold | 339011SGD | | WALNUT | STERLING GOLD |
| Natural Brass | 339011NBR | | MEDIUM CHERRY | DARK CHERRY |

| Qty: | |
|--|---|
| Comments: | |
| | |
| | Use only ETL/UL listed electrical junction boxes marked ""For Fan Support"" |
| Electrical Requirements | 120V 60Hz AC |
| Hanging Weight | 17 LBS |
| Minimum Distance Betwee Bottom Of Fan Blade To Floor | |

Project Name:

Location: ___

Туре: ___


| Product ID | Descr |
|------------|--------------------------------|
| 337001WH | Universal Remote Control |
| 337012ALM | 4 Speed Fan Slide Control |
| 337012IV | 4 Speed Fan Slide Control |
| 337012WH | 4 Speed Fan Slide Control |
| 337214 | Limited Function Cooltouch |
| 370039MUL | Wall Control System L-Function |
| 370040 | 4 Speed Rotary Switch 10 AMP |
| 3R400AP | CoolTouch Control System R400 |

Sutter Place 52" Collection 52 Inch Sutter Place Fan SNW

339011SNW (Satin Natural White)

| OBE TO STATE OF THE STATE OF TH | |
|--|--|

Dimensions

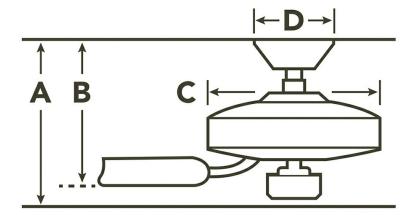

| Downrod | Α | В | С | D |
|----------------|-------|-------|-------|------|
| 1.00 OD X 4.00 | 12.25 | 10.75 | 12.00 | 5.25 |
| FLUSH MOUNT | 9.50 | 8.00 | 12.00 | 5.25 |

Available Finishes

| Finish | Fixture | Glass | Blade 1 | Blade 2 |
|-----------------------|-----------|-------|--------------|------------------|
| Antique Pewter | 339011AP | N/A | LIGHT CHERRY | BLACK CHERRY |
| Oil Brushed Bronze | 339011OBB | N/A | WALNUT | MEDIUM CHERRY |

| Project Name: | |
|---------------|--|
| Location: | |
| Туре: | |
| Qty: | |
| Comments: | |

Product Information

| Product ID | 339011SNW |
|--------------|-----------------------------|
| Finish | Satin Natural White |
| Blade Finish | Satin White/Non-Reversible |
| Collection | Sutter Place 52" Collection |

Airflow, Power and Efficiency

| Speed | RPM | CFM | CFM/ Watt | Amps | Watts |
|-------|-----|------|-----------|------|-------|
| High | 160 | 4500 | 76 | .49 | 59 |
| Med | 113 | 3196 | 114 | .35 | 28 |
| Low | 62 | 1602 | 169 | .2 | 10 |

Specifications

| Number of Blades | 5 |
|---------------------------|--------------------------|
| Blades Included | Yes |
| Blade Pitch | 12 Degrees |
| Blade Sweep | 52" |
| Blades Reversible | Yes |
| Blade Material | WOOD |
| Optional Blades Available | No |
| Downrod 1 | 1.00 OD X 4.00 |
| Downrod 2 | FLUSH MOUNT |
| Primary Control System | Pull Chain |
| Remote Included | No |
| Wall Control Included | No |
| Low Ceiling Adaptable | Yes, Dual Mount Included |
| Lead Wire Length | 78.00" |
| Motor Size | 153MM X 15MM |
| Motor Type | AC |
| | |

Downlight

Optional Light Kit Available

Safety Listings & Certifications

| Safety Rated | Dry |
|--------------|--------------------------|
| Warranty | www.kichler.com/warranty |

Installation

The electrical junction box and support structure must be



7711 East Pleasant Valley Road Cleveland, Ohio 44131-8010 Toll free: 866.558.5706 or kichler.com

1) Information provided is subject to change without notice. All values are design or typical values when measured under

2) Incandescent Equivalent: The incandescent equivalent as presented is an approximate number and is for reference only.



Sutter Place 52" Collection 52 Inch Sutter Place Fan SNW

339011SNW (Satin Natural White)

| Finish | Fixture | Glass | Blade 1 | Blade 2 |
|------------------------|-----------|-------|--------------------|--------------------|
| Satin Natural White | 339011SNW | N/A | SATIN NAT WHITE | SATIN NAT WHITE |
| Olde Bronze | 339011OZ | N/A | WALNUT | MEDIUM CHERRY |
| Matte White | 339011MWH | | MATTE WHITE | MATTE WHITE |
| Sterling Gold | 339011SGD | | WALNUT | STERLING GOLD |
| Natural Brass | 339011NBR | | MEDIUM CHERRY | DARK CHERRY |

| Type: | |
|---|---|
| Qty: | |
| Comments: | |
| | |
| Installation requirements | securely mounted and capable of reliably supporting a minimum of 50 pounds. Use only ETL/UL listed electrical junction boxes marked ""For Fan Support"" |
| Electrical Requirements | 120V 60Hz AC |
| Hanging Weight | 17 LBS |
| Minimum Distance Between Bottom Of Fan Blade To Floor | 7.5 feet |

Project Name: ____ Location: _____

| Product ID | Descr |
|------------|--------------------------------|
| 337001WH | Universal Remote Control |
| 337012ALM | 4 Speed Fan Slide Control |
| 337012IV | 4 Speed Fan Slide Control |
| 337012WH | 4 Speed Fan Slide Control |
| 337214 | Limited Function Cooltouch |
| 370039MUL | Wall Control System L-Function |
| 370040 | 4 Speed Rotary Switch 10 AMP |
| 3R400AP | CoolTouch Control System R400 |