


ZEDRA  
Pilar Tap 1/2"  
MODEL # 30026000

Pure Freude an Wasser



GROHE America, Inc | 200 North Gary Avenue, Suite G, Roselle, IL 60172  
Phone: +1 (800) 444-7643 | Fax: +1 (800) 225-2778 | us-customerservice@grohe.com

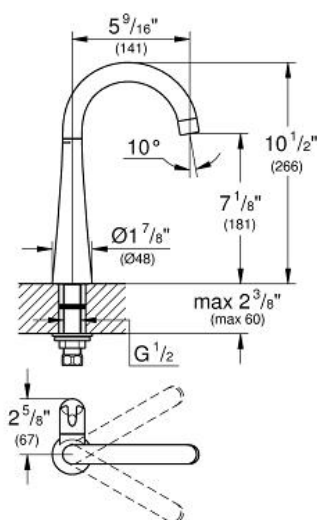

ADA

**Product Description:**  
Pilar Tap 1/2"

**Standard Specification:**


- Single hole installation
- **GROHE StarLight** finish
- Ceramic cartridge
- Flow control
- Swivel Spout
- Swivel area 360°
- Spout Reach 5 9/16"
- Max Flow Rate: 1.75 gpm (6.6 L/min)

**Applicable Codes & Standards:**

- Energy Policy Act of 1992
- NSF 61
- ASME A112.18.1/CSA B125.1
- US Federal and State material regulations
- ICC/ANSI A117.1

**Color:**

- 30026000 000 chrome

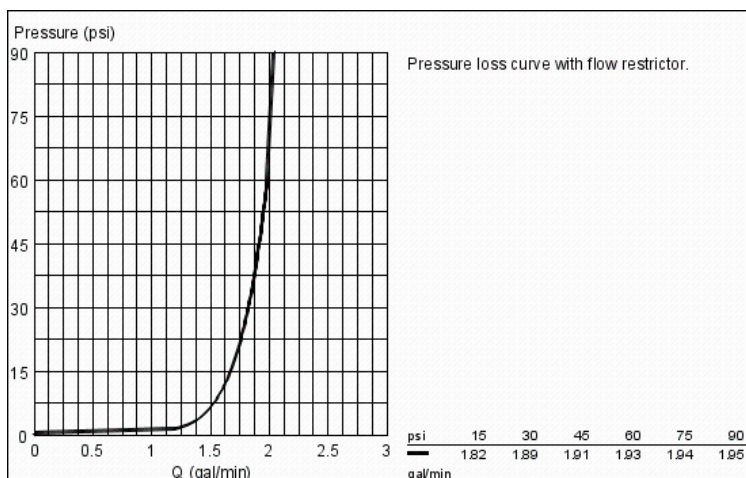


ZEDRA  
Pilar Tap 1/2"  
MODEL # 30026DC0

Pure Freude an Wasser



GROHE America, Inc | 200 North Gary Avenue, Suite G, Roselle, IL 60172  
Phone: +1 (800) 444-7643 | Fax: +1 (800) 225-2778 | us-customerservice@grohe.com

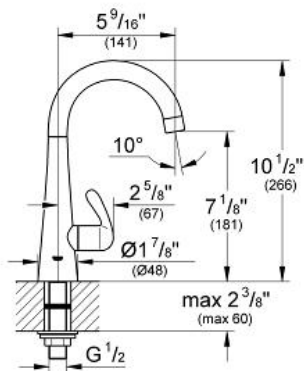

ADA

**Product Description:**  
Pilar Tap 1/2"

**Standard Specification:**


- Single hole installation
- Ceramic cartridge
- **GROHE StarLight** finish
- Swivel area 360°
- Swivel Spout
- Spout Reach 5 9/16"
- Flow control
- **GROHE SuperSteel** Infinity Finish™
- Max Flow Rate: 1.75 gpm (6.6 L/min)

**Applicable Codes & Standards:**

- Energy Policy Act of 1992
- NSF 61
- ASME A112.18.1/CSA B125.1
- US Federal and State material regulations
- ICC/ANSI A117.1

**Color:**

- 30026DC0 DC0 supersteel

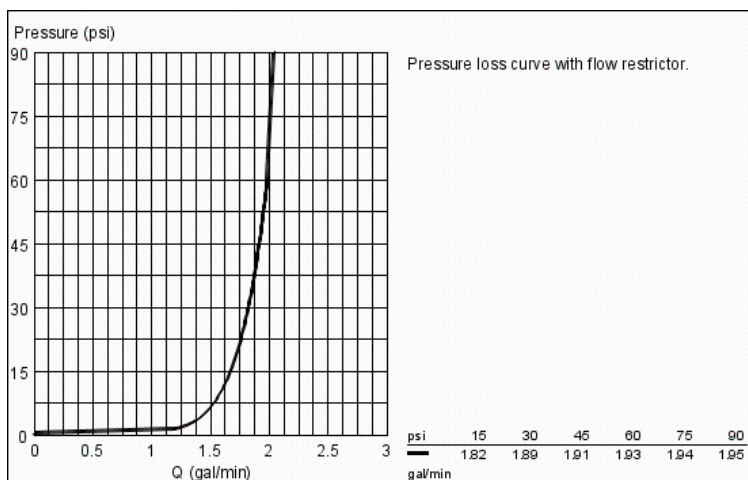


ZEDRA  
Pilar Tap 1/2"  
MODEL # 30026SD0

Pure Freude an Wasser



GROHE America, Inc | 200 North Gary Avenue, Suite G, Roselle, IL 60172  
Phone: +1 (800) 444-7643 | Fax: +1 (800) 225-2778 | us-customerservice@grohe.com

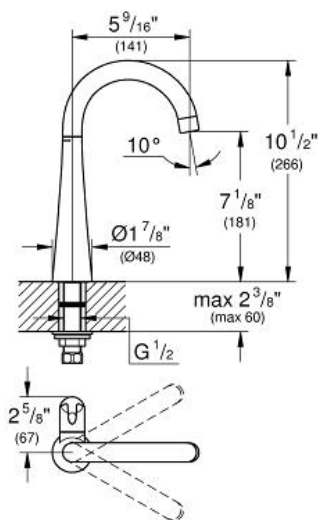

**Product Description:**  
Pilar Tap 1/2"

**Standard Specification:**

- Single hole installation
- **GROHE StarLight** finish
- **GROHE RealSteel** Stainless Steel Construction produced from Grade 304 stainless steel
- Ceramic cartridge
- Flow control
- Swivel Spout
- Swivel area 360°
- Spout Reach 5 9/16"
- Max Flow Rate: 1.75 gpm (6.6 L/min)

**Applicable Codes & Standards:**

- Energy Policy Act of 1992
- NSF 61
- ASME A112.18.1/CSA B125.1
- US Federal and State material regulations
- ICC/ANSI A117.1

**Color:**

- 30026SD0 SD0 stainless steel, brushed

