

Standard Specification:

Normal, Jet, Rain, Massage, Champagne spray

GROHE DreamSpray perfect spray pattern

GROHE StarLight chrome finish

SpeedClean anti-lime system

Inner WaterGuide for a longer life

universal mounting system, fitting all standard shower hoses The hand shower is suitable for minimum flow rate of 5 l/min and a maximum of 9.5 l/min

(ASME A112.18.1M). Minimum pressure

> 0.5 bar, maximum 6 bar (ASME A112.18.1M).


Color:

□ 27125000 000 chrome







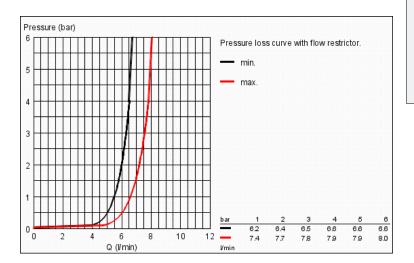

Standard Specification:

Normal, Jet, Rain, Massage, Champagne spray

GROHE DreamSpray perfect spray pattern

GROHE StarLight chrome finish

SpeedClean anti-lime system

Inner WaterGuide for a longer life

universal mounting system, fitting all standard shower hoses

The hand shower is suitable for minimum flow rate of 5 l/min and a maximum of 9.5 l/min

(ASME A112.18.1M). Minimum pressure > 0.5 bar, maximum 6 bar (ASME A112.18.1M).


Color:

□ 27125BE0 BE0 sterling / brilliant nickel







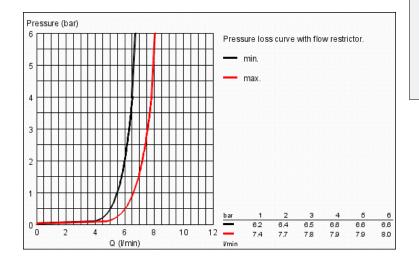

Standard Specification:

Normal, Jet, Rain, Massage, Champagne spray

GROHE DreamSpray perfect spray pattern

GROHE StarLight chrome finish

SpeedClean anti-lime system

Inner WaterGuide for a longer life

universal mounting system, fitting all standard shower hoses

The hand shower is suitable for minimum flow rate of 5 l/min and a maximum of 9.5 l/min

(ASME A112.18.1M). Minimum pressure

> 0.5 bar, maximum 6 bar (ASME A112.18.1M).


Color:

□ 27125EN0 EN0 brushed nickel







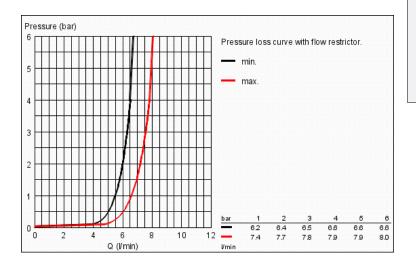

Standard Specification:

Normal, Jet, Rain, Massage, Champagne spray
GROHE DreamSpray perfect spray pattern
GROHE StarLight chrome finish
SpeedClean anti-lime system
Inner WaterGuide for a longer life
universal mounting system, fitting all standard shower hoses
The hand shower is suitable for minimum flow
rate of 5 l/min and a maximum of 9.5 l/min

(ASME A112.18.1M). Minimum pressure > 0.5 bar, maximum 6 bar (ASME A112.18.1M).

Color:

□ 27125ZB0 ZB0 oil rubbed bronze