

Link Collection

52" Link Ceiling Fan NBR

300168NBR (Natural Brass)

Project Name: \_\_\_\_\_

Location: \_\_\_\_\_

Type: \_\_\_\_\_

Qty: \_\_\_\_\_

Comments: \_\_\_\_\_

Product Information

Product ID	300168NBR
Finish	Natural Brass
Blade Finish	Cherry/Non-Reversible
Collection	Link Collection

Airflow, Power and Efficiency

Speed	RPM	CFM	CFM/ Watt	Amps	Watts
High	152	5126	158	.46	32
Med	90	2988	336	.14	9
Low	51	1387	408	.06	3

Specifications

Number of Blades	2
Blades Included	Yes
Blade Pitch	28 Degrees
Blade Sweep	54"
Blades Reversible	No
Blade Material	ABS
Optional Blades Available	No
Downrod 1	FLUSH MOUNT
Primary Control System	6 Speed Dc Cooltouch
Remote Included	Yes
Wall Control Included	No
Low Ceiling Adaptable	No
Lead Wire Length	8.00"
Motor Size	125
Motor Type	DC

Downlight

Optional Light Kit Available	No
------------------------------	----

Safety Listings & Certifications


Safety Rated	Dry
Warranty	www.kichler.com/warranty

Installation

The electrical junction box and support structure must be securely mounted and capable of reliably supporting a minimum of 50 pounds.

Installation requirements

Dimensions

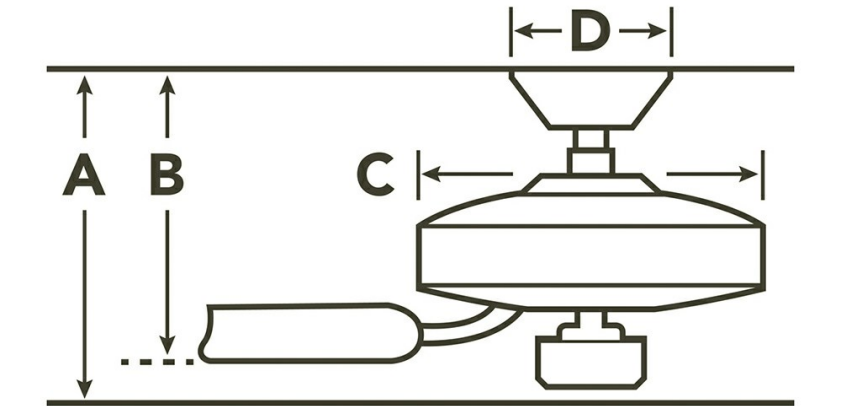

Downrod	A	B	C	D
FLUSH MOUNT	24.25	24.25	7.90	7.90

Available Finishes

Finish	Fixture	Glass	Blade 1	Blade 2
--------	---------	-------	---------	---------

Link Collection

52" Link Ceiling Fan NBR

300168NBR (Natural Brass)

Project Name: \_\_\_\_\_

Location: \_\_\_\_\_

Type: \_\_\_\_\_

Qty: \_\_\_\_\_

Comments: \_\_\_\_\_

Finish	Fixture	Glass	Blade 1	Blade 2
Brushed Nickel	300168NI	N/A	SILVER	NON-REVERSIBLE
Oil Brushed Bronze	300168OBB	N/A	DARK OAK	NON-REVERSIBLE
Polished Nickel	300168PN	N/A	WALNUT	NON-REVERSIBLE
Natural Brass	300168NBR		CHERRY	NON-REVERSIBLE

	Use only ETL/UL listed electrical junction boxes marked ""For Fan Support""
Electrical Requirements	120V 60Hz AC
Hanging Weight	18.7 LBS
Minimum Distance Between Bottom Of Fan Blade To Floor	7.5 feet

Control Options

Product ID	Descr
370036ALMTR	6 Speed DC Wall Transmitter
370036IVTR	6 Speed DC Wall Transmitter
370036WHTR	6 Speed DC Wall Transmitter

Link Collection

52 Inch Link Fan NI

300168NI (Brushed Nickel)

Project Name: \_\_\_\_\_

Location: \_\_\_\_\_


Type: \_\_\_\_\_

Qty: \_\_\_\_\_

Comments: \_\_\_\_\_



Dimensions

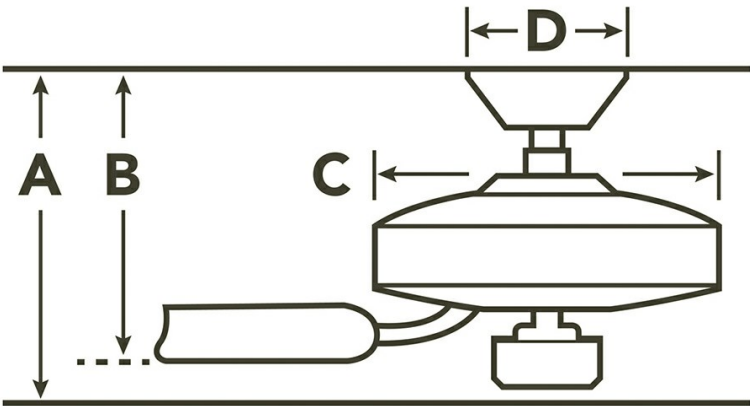

Downrod	A	B	C	D
FLUSH MOUNT	24.25	24.25	7.90	7.90

Available Finishes

Finish	Fixture	Glass	Blade 1	Blade 2
--------	---------	-------	---------	---------

Product Information

Product ID	300168NI
Finish	Brushed Nickel
Blade Finish	Silver/Non-Reversible
Collection	Link Collection

Airflow, Power and Efficiency

Speed	RPM	CFM	CFM/ Watt	Amps	Watts
High	152	5126	158	.46	32
Med	90	2988	336	.14	9
Low	51	1387	408	.06	3

Specifications

Number of Blades	2
Blades Included	Yes
Blade Pitch	28 Degrees
Blade Sweep	54"
Blades Reversible	No
Blade Material	ABS
Optional Blades Available	No
Downrod 1	FLUSH MOUNT
Primary Control System	6 Speed Dc Cooltouch
Remote Included	Yes
Wall Control Included	No
Low Ceiling Adaptable	No
Lead Wire Length	8.00"
Motor Size	125
Motor Type	DC

Downlight

Optional Light Kit Available	No
------------------------------	----

Safety Listings & Certifications

Safety Rated	Dry
Warranty	www.kichler.com/warranty

Installation

The electrical junction box and support structure must be securely mounted and capable of reliably supporting a minimum of 50 pounds.

Installation requirements

Link Collection

52 Inch Link Fan NI

300168NI (Brushed Nickel)

Project Name: \_\_\_\_\_

Location: \_\_\_\_\_

Type: \_\_\_\_\_

Qty: \_\_\_\_\_

Comments: \_\_\_\_\_

Finish	Fixture	Glass	Blade 1	Blade 2
Brushed Nickel	300168NI	N/A	SILVER	NON-REVERSIBLE
Oil Brushed Bronze	300168OBB	N/A	DARK OAK	NON-REVERSIBLE
Polished Nickel	300168PN	N/A	WALNUT	NON-REVERSIBLE
Natural Brass	300168NBR		CHERRY	NON-REVERSIBLE

	Use only ETL/UL listed electrical junction boxes marked ""For Fan Support""
Electrical Requirements	120V 60Hz AC
Hanging Weight	18.7 LBS
Minimum Distance Between Bottom Of Fan Blade To Floor	7.5 feet

Control Options

Product ID	Descr
370036ALMTR	6 Speed DC Wall Transmitter
370036IVTR	6 Speed DC Wall Transmitter
370036WHTR	6 Speed DC Wall Transmitter

Link Collection

52 Inch Link Fan OBB

300168OBB (Oil Brushed Bronze)

Project Name: \_\_\_\_\_

Location: \_\_\_\_\_


Type: \_\_\_\_\_

Qty: \_\_\_\_\_

Comments: \_\_\_\_\_



Dimensions

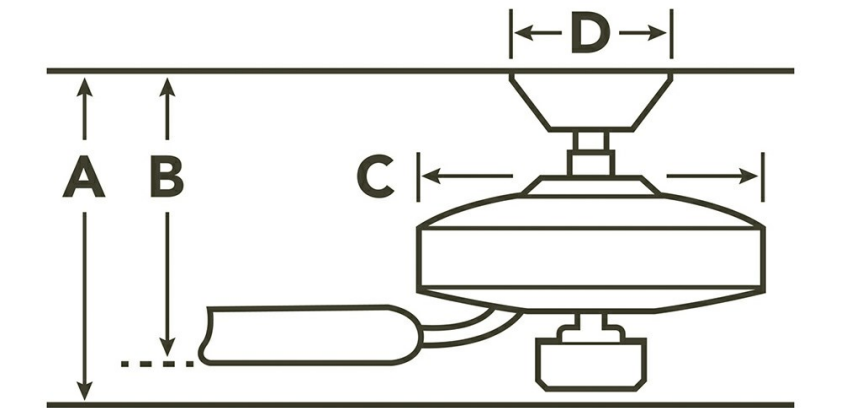

Downrod	A	B	C	D
FLUSH MOUNT	24.25	24.25	7.90	7.90

Available Finishes

Finish	Fixture	Glass	Blade 1	Blade 2
--------	---------	-------	---------	---------

Product Information

Product ID	300168OBB
Finish	Oil Brushed Bronze
Blade Finish	Dark Oak/Non-Reversible
Collection	Link Collection

Airflow, Power and Efficiency

Speed	RPM	CFM	CFM/ Watt	Amps	Watts
High	152	5126	158	.46	32
Med	90	2988	336	.14	9
Low	51	1387	408	.06	3

Specifications

Number of Blades	2
Blades Included	Yes
Blade Pitch	28 Degrees
Blade Sweep	54"
Blades Reversible	No
Blade Material	ABS
Optional Blades Available	No
Downrod 1	FLUSH MOUNT
Primary Control System	6 Speed Dc Cooltouch
Remote Included	Yes
Wall Control Included	No
Low Ceiling Adaptable	No
Lead Wire Length	8.00"
Motor Size	125
Motor Type	DC

Downlight

Optional Light Kit Available	No
------------------------------	----

Safety Listings & Certifications

Safety Rated	Dry
Warranty	www.kichler.com/warranty

Installation

The electrical junction box and support structure must be securely mounted and capable of reliably supporting a minimum of 50 pounds.

Installation requirements

Link Collection

52 Inch Link Fan OBB

300168OBB (Oil Brushed Bronze)

Project Name: \_\_\_\_\_

Location: \_\_\_\_\_

Type: \_\_\_\_\_

Qty: \_\_\_\_\_

Comments: \_\_\_\_\_

Finish	Fixture	Glass	Blade 1	Blade 2
Brushed Nickel	300168NI	N/A	SILVER	NON-REVERSIBLE
Oil Brushed Bronze	300168OBB	N/A	DARK OAK	NON-REVERSIBLE
Polished Nickel	300168PN	N/A	WALNUT	NON-REVERSIBLE
Natural Brass	300168NBR		CHERRY	NON-REVERSIBLE

	Use only ETL/UL listed electrical junction boxes marked ""For Fan Support""
Electrical Requirements	120V 60Hz AC
Hanging Weight	18.7 LBS
Minimum Distance Between Bottom Of Fan Blade To Floor	7.5 feet

Control Options

Product ID	Descr
370036ALMTR	6 Speed DC Wall Transmitter
370036IVTR	6 Speed DC Wall Transmitter
370036WHTR	6 Speed DC Wall Transmitter

Link Collection

52 Inch Link Fan PN

300168PN (Polished Nickel)

Project Name: \_\_\_\_\_

Location: \_\_\_\_\_

Type: \_\_\_\_\_

Qty: \_\_\_\_\_

Comments: \_\_\_\_\_

Product Information

Product ID	300168PN
Finish	Polished Nickel
Blade Finish	Walnut/Non-Reversible
Collection	Link Collection

Airflow, Power and Efficiency

Speed	RPM	CFM	CFM/ Watt	Amps	Watts
High	152	5126	158	.46	32
Med	90	2988	336	.14	9
Low	51	1387	408	.06	3

Specifications

Number of Blades	2
Blades Included	Yes
Blade Pitch	28 Degrees
Blade Sweep	54"
Blades Reversible	No
Blade Material	ABS
Optional Blades Available	No
Downrod 1	FLUSH MOUNT
Primary Control System	6 Speed Dc Cooltouch
Remote Included	Yes
Wall Control Included	No
Low Ceiling Adaptable	No
Lead Wire Length	8.00"
Motor Size	125
Motor Type	DC

Downlight

Optional Light Kit Available	No
------------------------------	----

Safety Listings & Certifications


Safety Rated	Dry
Warranty	www.kichler.com/warranty

Installation

The electrical junction box and support structure must be securely mounted and capable of reliably supporting a minimum of 50 pounds.

Installation requirements

Dimensions

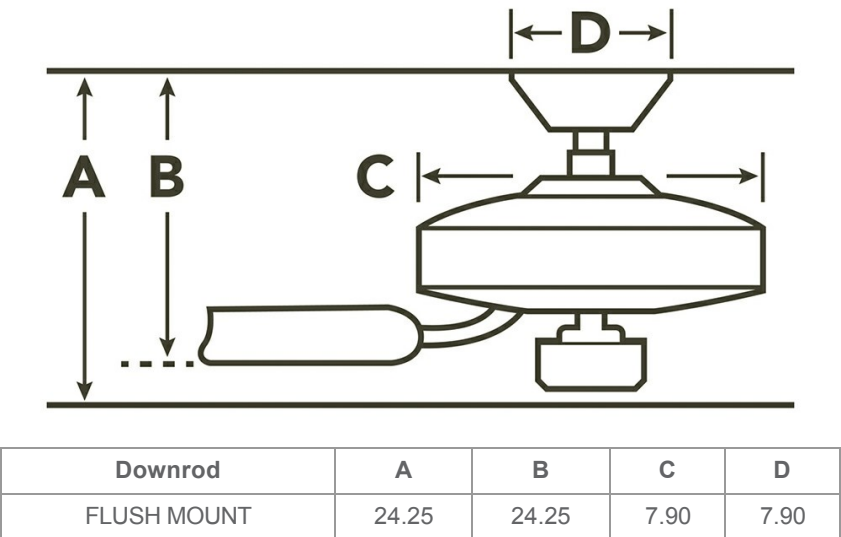

Available Finishes

Finish	Fixture	Glass	Blade 1	Blade 2
--------	---------	-------	---------	---------

Link Collection

52 Inch Link Fan PN

300168PN (Polished Nickel)

Project Name: \_\_\_\_\_

Location: \_\_\_\_\_

Type: \_\_\_\_\_

Qty: \_\_\_\_\_

Comments: \_\_\_\_\_

Finish	Fixture	Glass	Blade 1	Blade 2
Brushed Nickel	300168NI	N/A	SILVER	NON-REVERSIBLE
Oil Brushed Bronze	300168OBB	N/A	DARK OAK	NON-REVERSIBLE
Polished Nickel	300168PN	N/A	WALNUT	NON-REVERSIBLE
Natural Brass	300168NBR		CHERRY	NON-REVERSIBLE

	Use only ETL/UL listed electrical junction boxes marked ""For Fan Support""
Electrical Requirements	120V 60Hz AC
Hanging Weight	18.7 LBS
Minimum Distance Between Bottom Of Fan Blade To Floor	7.5 feet

Control Options

Product ID	Descr
370036ALMTR	6 Speed DC Wall Transmitter
370036IVTR	6 Speed DC Wall Transmitter
370036WHTR	6 Speed DC Wall Transmitter