# **INFINITY 2** – INFINITY SERIES

 $70 \times 35 \frac{1}{2} \times 30 \frac{3}{4} (1780 \times 900 \times 780) \bullet$  Fax on Demand #1287

#### AIR-WHIRLPOOL MODEL #AI2INF7135A



Not a drop-in model. Deck must be built around unit.

### AQUATIC ADVANTAGE

- National distribution
- 6 manufacturing facilities
- Private fleet

- Centralized customer service
- Field support
- 24-hour fax-on-demand

## FEATURES (ALL MODELS)

- Extra-soft magnetic comfort pillow
- Fast-fill waterfall spout (some models available without spout)
- Chromatherapy
- Deep bathing well with contoured seating (most models)
- Slip-resistant floor
- Sculptured arm rests
- Adjusta-level metal base
- Quiet pad anti-vibration pump mount
- Lucite® cast acrylic surface
- Factory run-tested
- Wood shipping crate
- Limited lifetime warranty
- UL and IAPMO listed

### **OPTIONS**

- Cable drive waste & overflow: Chrome, Oil Rubbed Bronze, Polished Brass, Brushed Nickel, Color Matched (Biscuit, Bone, White)
- Available Without Fast-fill Waterfall Spout
- Metallic Finish: (jets and suction fittings)
  Chrome, Polished Brass, Brushed
  Nickel

## **SYSTEMS**

#### WHIRLPOOL

- 16 whirlpool hydrotherapy jets including:
  - 12-jet shiatsu back massage system
  - Dual-port high-flow spinning jets
- High-flow directional jets
- 1.75 HP run-dry safe pump
- 1.5 Kw Inline maintenance heater
- Digital electronic control system with custom preset capability
- Shiatsu electronic control panel with pre-programmed jet sequencer

#### AIR BATH

- Air bath system featuring concealed in-floor air jets with check valves
- Variable-speed, heated-air blower with automated purge-and-dry cycle



#### **COLOR & TRIM OPTIONS**

Stock	Premium
Almond (C, M) Bone (C, M) Biscuit (C, M) White (C, M)	Black (C, M) Cashmere (M) Mexican Sand (M) Red (M) Sandbar (M) Sterling Silver (C, M)

C = Color Matched Trim

M = Metallic Trim (Brushed Nickel, Chrome, Polished Brass)








Infinity Series • Fax on Demand #1287


## **INFINITY 2**

 $70 \times 35 \frac{1}{2} \times 30 \frac{3}{4} (1780 \times 900 \times 780)$  inches (mm)




Not a drop-in model. Deck must be built around unit. This unit has a 3/4" female waterfall fill spout connection.

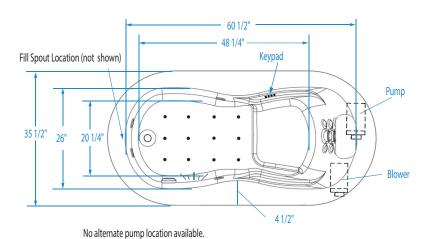

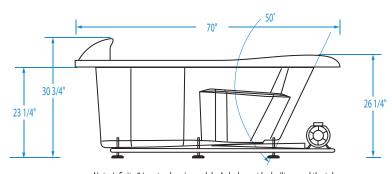

Note: Infinity 2 is not a drop in model.  $\,$  A deck must be built around the tub.



 $\textbf{FEATURES} \hspace{0.2cm} \textbf{lbs (kg)} \hspace{0.5cm} \textbf{Dimensional Tolerance} \pm 3/8". \hspace{0.2cm} \textbf{Dimensions needed for site preparation should be measured from the unit.} \hspace{0.2cm} \textbf{Aquatic assumes no responsibility for preparatory work.}$ 

Type and Model #	Material	Jets	Pump	Air System	Blower	Heater	Controls	Drain	Pkg. Wt.
Air-whirlpool #AI2INF7135A	Acrylic	16	1.75 HP	Injector	Variable speed	1.5 kw Inline	Electronic	Universal	356 (161)

#### DIMENSIONS inches (mm)

Width	Depth	Height	Skirt
Overall / Net	Overall / Net	Overall / Net	Height
70 (1780)	35 ½ (900)	30 <b>¾</b> (780)	-

#### PLUMBING DIMENSIONS inches (mm)

А	В	Drain Diameter / Clearance
2 3/8 (60)	9 ½ (240)	2 (50) / 2 3/4 (70)

#### NOTES:

1) Where applicable, utilize cut-out templates packed with unit for deck cutouts.

2)  $16 \times 16 (405 \times 405)$  minimum access required at pump/blower location(s).

#### SUMP DATA inches (mm)

Capacity to	Min. Operating Capacity	WIDTH @	centerline	DEPTH @ centerline		
gal (ltr)	gal (ltr)	Тор	Bottom	Тор	Bottom	
102 (385)	69 (260)	60 1/2 (1535)	48 1/4 (1225)	26 (660)	20 1/4 (515)	

#### **ELECTRICAL DATA**

Component	Specification	Requirement
Pump	1.75 HP; 12 AMP; 120 V	15 AMP 1 pole, separate circuit, Class A GFCI
Inline Heater	1.5 kW; 12 AMP; 120 V	15 AMP 1 pole, separate circuit, Class A GFCI
Blower	1.0 HP; 9.5 AMP; 120 V	15 AMP 1 pole, separate circuit, Class A GFCI